

6

5

4

3


2

1


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/19/18	

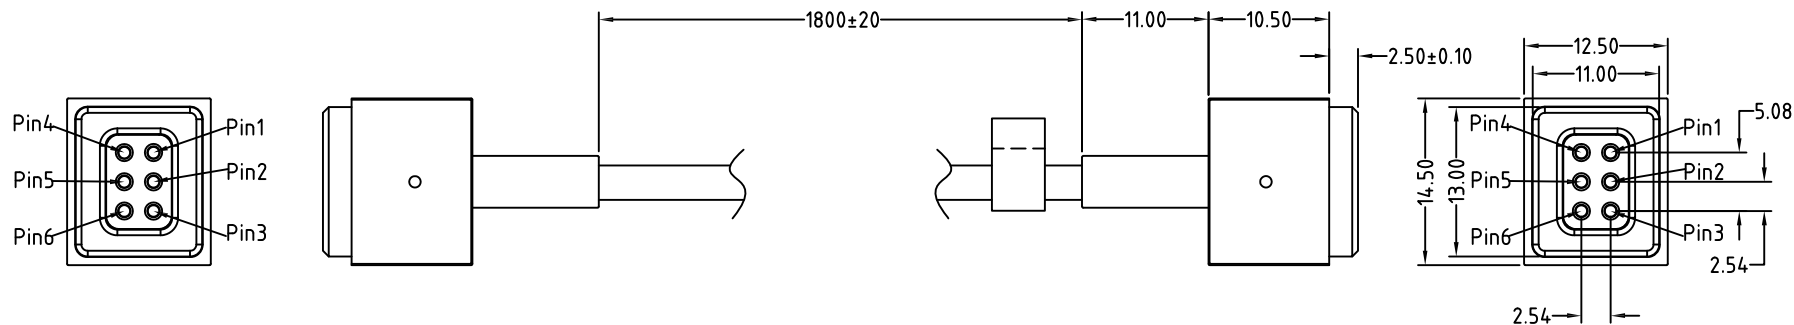

CONN→CONN	
Pin1.Pin6	Vcc Pin1.Pin6
Pin3.Pin4	GND Pin3.Pin4

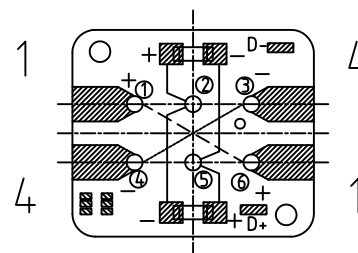

SPECIFICATIONS:

Electrical:

Rated Current & Voltage: 12VDC, 3A

Contact resistance: 50 mohms max

Mechanical:

Contact force: 70±20g @ 1.0mm working stroke

Durability: 20,000 Cycles

Electrical Test:

All Assemblies must be 100% Tested for Shorts, Open, Continuity, and Physical Appearance.

Environmental:

Lead free, RoHS compliant.



MATING PART: PH2-C25410-06-FVP

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED		ADAM TECH		909 Rahway Avenue, Union, NJ 07083	
Millimeters HOLES		INTERCONNECTS		Phone: 908-687-5000 Fax: 908-687-5710	
.X	± .25	∅.XX	± .15	TITLE	
.XX	± .15	2.54MM PITCH POGO PIN CABLE, MALE, 2X3P			
.XXX	± .05	SIZE PART NO.			
APPROVALS		DATE		REV.	
DRAWN	HR	9/19/18		-	
CHECKED	CK	9/19/18		CA-ST6-PH2-254105-M	
APPROVED				REF: S00170C SCALE: NTS SHEET 1 OF 1	

6

5

4

3

2

1

D

D

C

C

B

B

A

A