

6

5

4

3


2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/18/18	

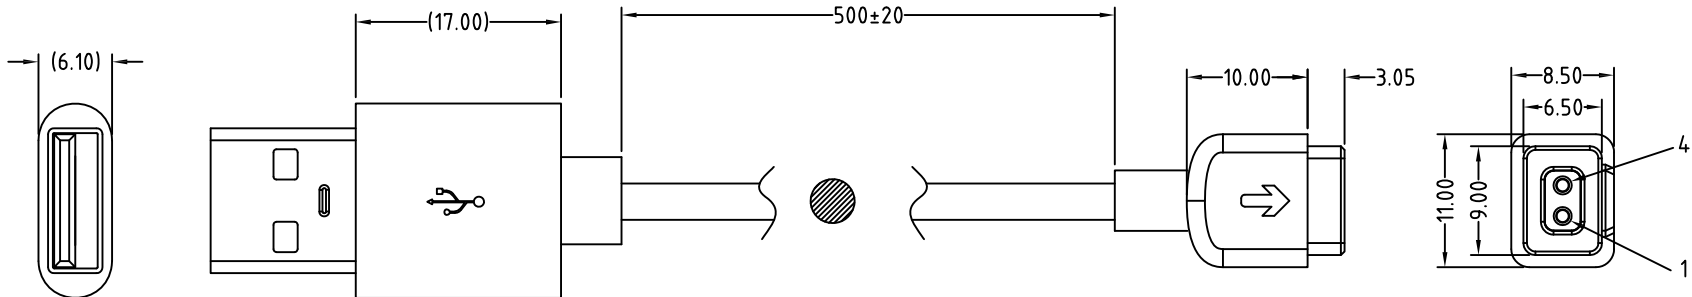

USB→wire→CONN	
Vcc_1- Red	→ 1
GND_4-Black	→ 4

SPECIFICATIONS:

Connector:

P1 = POGO Pin connector, 2P Male, Overmold Color: Black, 45P PVC

P2 = USB Type-A Male, Insulator Color: Black, Contact: Gold flash plated

Cable:

26AWG, O.D: .098" [2.5mm], Jacket Color: Black, PVC

Electrical:

Rating Current & Voltage (Per Contact): DC12V, 5A

Contact resistance: 50 mohms max

Mechanical:

Contact Force: 70±20g @ 1.0mm working stroke

Durability: 20,000 cycles

Electrical Test:

All Assemblies must be 100% Tested for Shorts, Open, Continuity, and Physical Appearance.

Environmental:

Lead free, RoHS compliant.



Mating with: PH1-3B-02-FVMP-6910

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED		<b>ADAM TECH</b>		909 Rahway Avenue, Union, NJ 07083	
Millimeters		<b>INTERCONNECTS</b>		Phone: 908-687-5000	
30-150 ± 0.15				Fax: 908-687-5710	
6-30 ± 0.10					
0-6 ± 0.05					
ANGEL					
± 1°					
APPROVALS			DATE		
DRAWN	HR	10/18/18			
CHECKED	CK	10/18/18			
APPROVED					
TITLE 2.54MM PITCH POGO PIN CABLE, MALE, 2P					
SIZE X	PART NO. CA-ST2-PH1-25410-M			REV. -	
REF: S00200T		SCALE: NTS		SHEET 1 OF 1	

6

5

4

3

2

1