

6

5

4

3

2

1

APPROVED: \_\_\_\_\_  
DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/12/18	

D

D

C


C

B

B

A

A

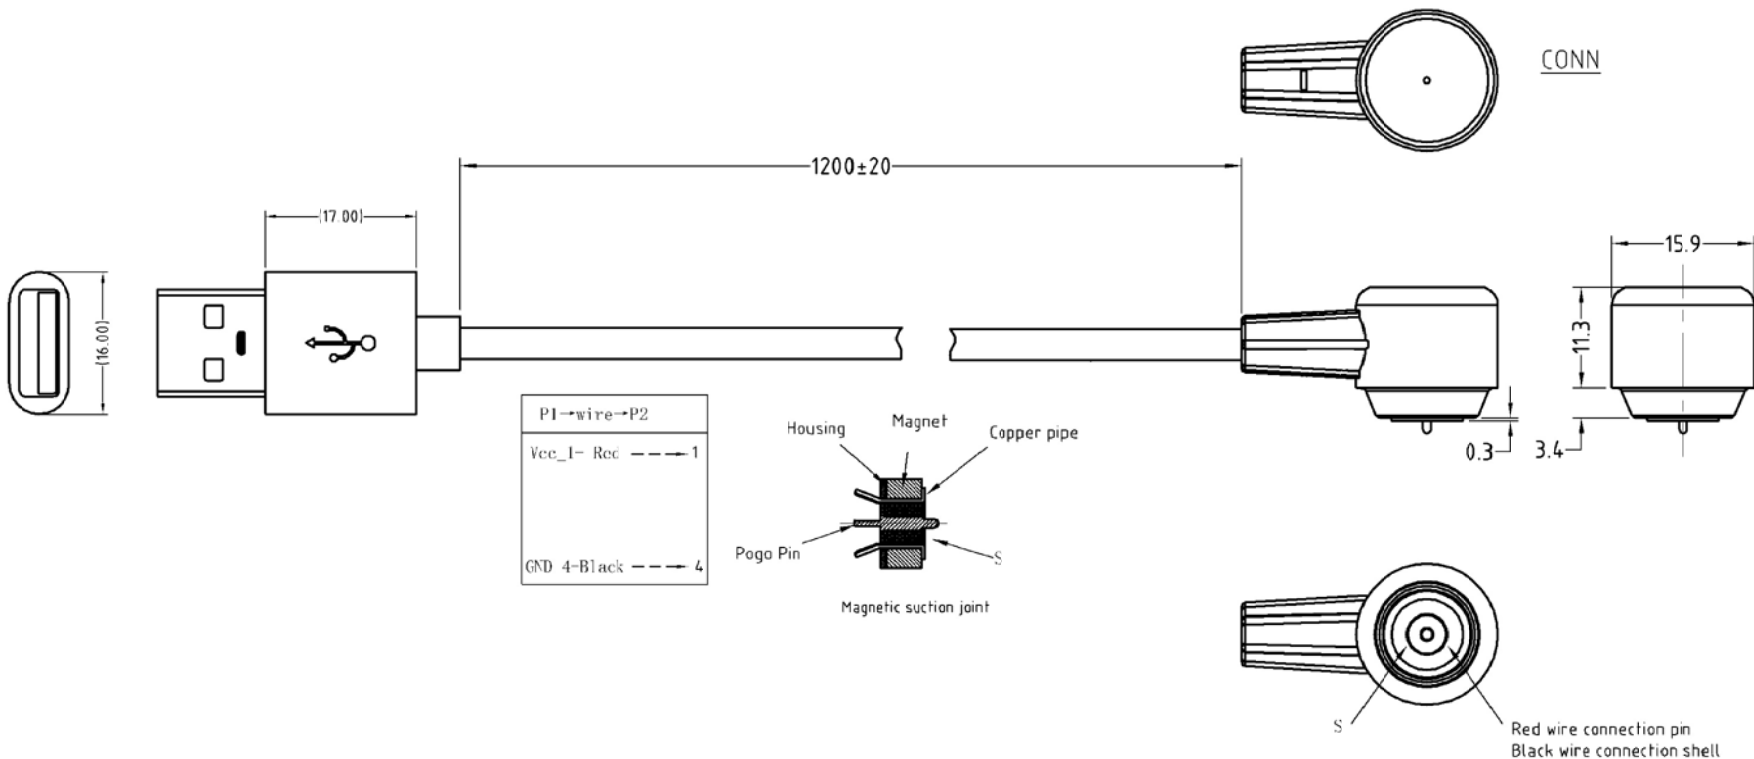

SPECIFICATIONS:

Connector:

P1 = USB Type-A Male, Insulator Color: White, Contact: Gold flash plated  
Overmold Color: White, 45P PVC, Salt spray test: 48H  
P2 = Circular POGO Pin connector Male, Right angle, Overmold Color: White, 45P PVC

Cable:

20AWG, 2C, O.D: .157" [4mm], Jacket Color: White, PVC 55P

Electrical:

Rated Current & Voltage: 52VDC, 3A max  
Contact resistance: 50 mohms max

Electrical Test:

All Assemblies must be 100% Tested for  
Shorts, Open, Continuity, and Physical Appearance.

Environmental:

Lead free, RoHS compliant.



Mating with: PHR-C4777-02A-FVP-800

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED Millimeters ANGLE		<b>ADAM TECH</b>		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
0~6 ± 0.10		<b>INTERCONNECTS</b>		TITLE	
6~30 ± 0.20 ± 2°		APPROVALS		DATE	
30~150 ± 0.30		DRAWN		HR	
		CHECKED		CK	
		APPROVED		11/12/18	
SIZE		PART NO.		REV.	
X		CA-RA2-PHR-34113-M-WT		-	
REF: S00170C		SCALE: NTS		SHEET 1 OF 1	

6

5

4

3

2

1