



APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	06/21/16	
A		UPDATE DRAWING	5/7/19	AY/AC
B		UPDATE SPEC.	7/9/19	AY/RC

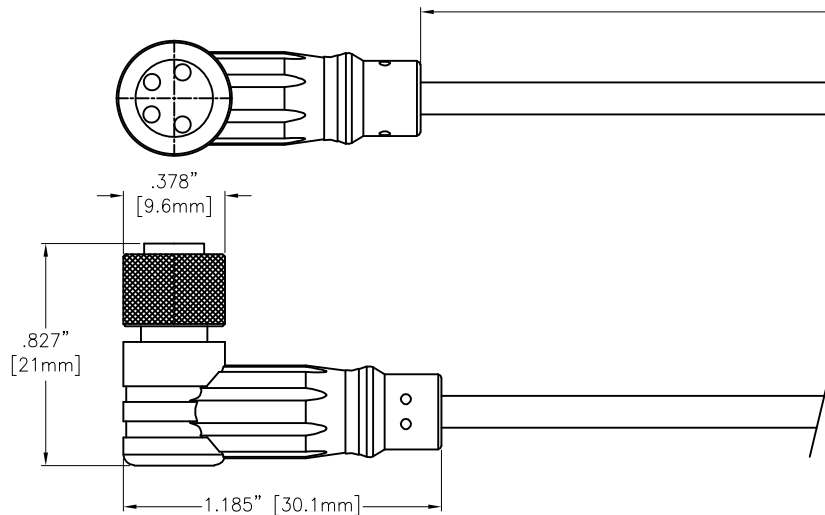


01	Black	01	Brown
02	Brown	02	Blue
03	White	03	Red
04	Green	04	Yellow
05	Blue	05	Green
06	White	06	White
CONN 1	OPEN	CONN 1	OPEN
PIN ASSIGNMENTS 2P~5P		PIN ASSIGNMENTS 6P	

PART NO.	L
SD-PMEXXX-FFTBR-CXX-3FT	36"±1.80" [914.4±45.72mm]
SD-PMEXXX-FFTBR-CXX-6FT	72"±3.60" [1828.8±91.44mm]
SD-PMEXXX-FFTBR-CXX-10FT	120"±6.000" [3048±152.4mm]

SD-PMEXXX-FFTBR-CXX-XFT
7=IP67 A=UL2464
B=UL2517

CONTACT : BRASS ; GOLD PLATED.
NUT : BRASS ; NICKEL PLATED.
UL2464 CABLE 2PIN~5PIN 24AWG ; 6PIN 26AWG(2A 300V)
OVERMOLD : PVC ; COLOR : BLACK
M8 CONN
DESCRIPTION

SPECIFICATIONS:
Electrical:
Current rating: XXA=2A, XXB=5A
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant.

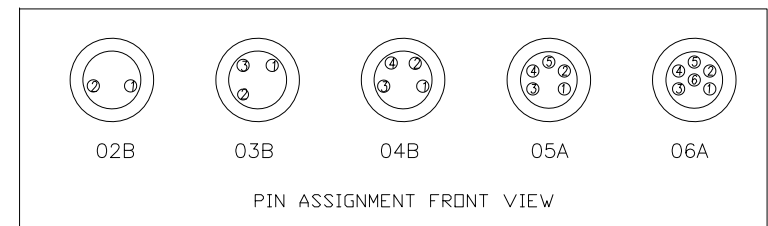

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		DATE		TITLE	
DRAWN	TW	06/21/16		WATERPROOF CONNECTOR, FEMALE, M8 ASSEMBLY CABLE, RIGHT ANGLE	
CHECKED				SIZE X	PART NO. SD-PMEXXX-FFTBR-CXX-XFT
APPROVED				REV. B	
REF: S00298T		SCALE: NTS		SHEET 1 OF 1	