


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/14/07	
A		REDRAWN	8/30/10	
B		REVISED SHAPE & SPEC.	9/3/12	

APPROVED: _____
DATE: _____ TITLE: _____

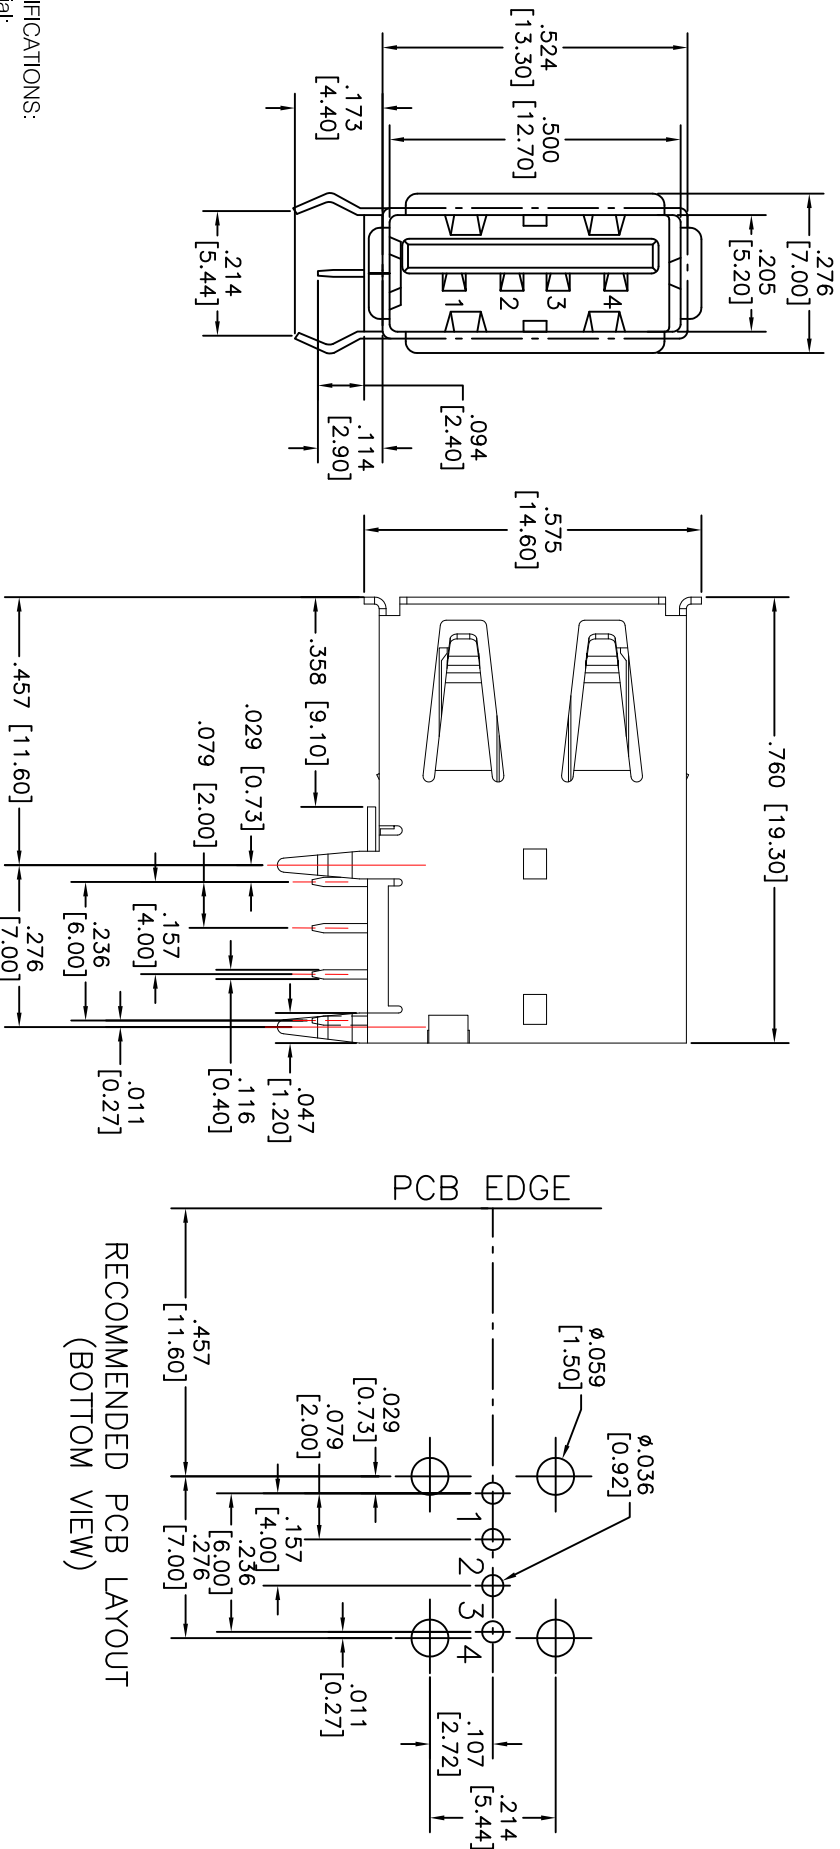

RECOMMENDED PCB LAYOUT
(BOTTOM VIEW)

SPECIFICATIONS:
Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: White
Contacts: Phosphor Bronze
Shell: Brass, Nickel plated
Rear Shell: SPC, Nickel plated
Plating:
Gold flash over Nickel underplate on contact area,
Tin over Copper underplate on tails.
Electrical:
Rated Voltage And Current: 1.5A At 250VAC Minimum.
Contact resistance: 30 mohms max
Insulation resistance: 100 Mohms min
Dielectric withstanding voltage: 750 VAC for 1 minute
Temperature Rating:
Operating temperature: -55°C to +85°C
Environmental:
Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH			
INCHES				909 Railway Avenue, Union, NJ 07083			
Holes				Phone: 908-687-5000 Fax: 908-687-5710			
.X ± .10				USB, TYPE A, RIGHT ANGLE UPRIGHT			
.XX ± .020				THRU-HOLE, SEL GOLD PLATED			
.XXX ± .015				DATE			
APPROVALS				TITLE			
DRAWN				SS			
CHECKED				3/14/07			
APPROVED				X			
REF: S00095T				SCALE: NTS			
SHEET 1 OF 1				REV. B			