
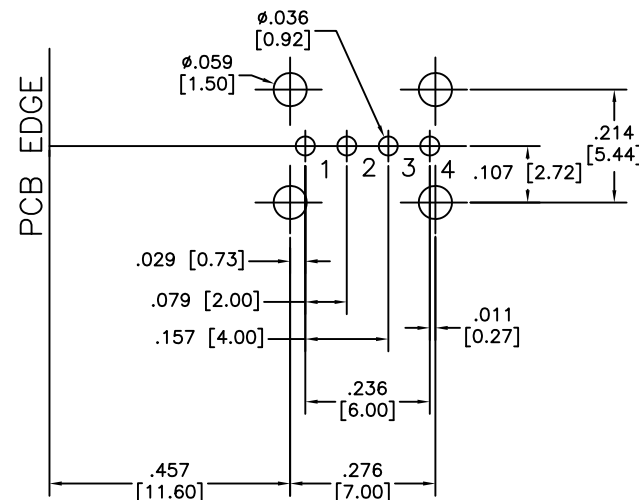
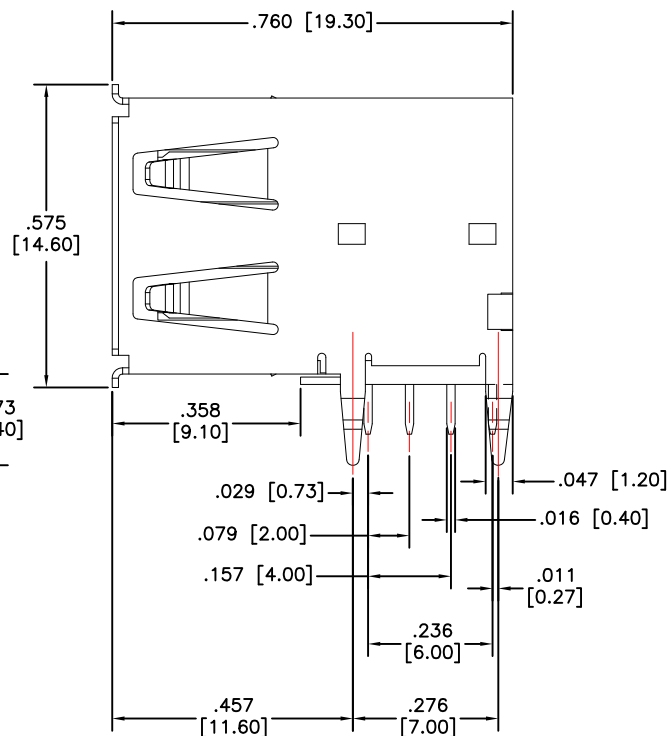


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/5/10	
A		REVISED SHAPE & SPEC.	9/3/12	

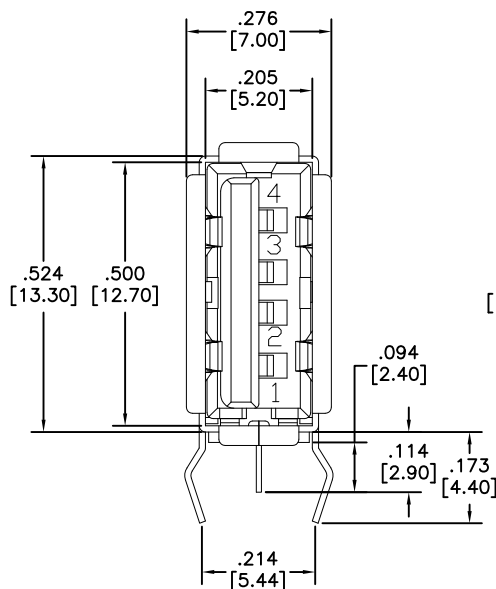

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: White

Contacts: Phosphor Bronze

Shell: Brass, Nickel plated

Rear Shell: SPCC, Nickel plated

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Copper underplate on PCB tails

Electrical:

Rated Voltage And Current: 1.5A At 250VAC Minimum.

Contact resistance: 30 mohms max.

Insulation resistance: 1000 Mohms min. @ 500 VDC

Dielectric withstanding voltage: 750 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES .X ± .10 .XX ± .020 .XXX ± .015			HOLES Ø.X ± .10 Ø.XX ± .015 Ø.XXX ± .010			ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
APPROVALS			DATE			TITLE			
DRAWN		AY	10/5/10			USB, TYPE A, RIGHT ANGLE UPRIGHT THRU-HOLE, SEL GOLD PLATED			
CHECKED		VW	10/5/10			SIZE X		PART NO. USB-A-S-RU-WT	REV A
APPROVED						REF: S00095T		SCALE: NTS	SHEET 1 OF 1