
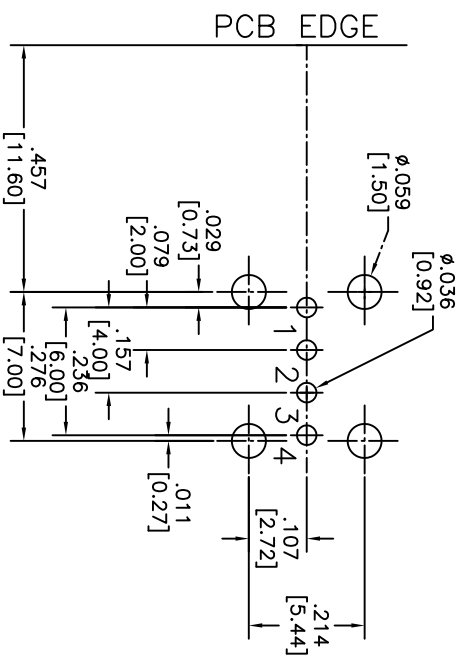
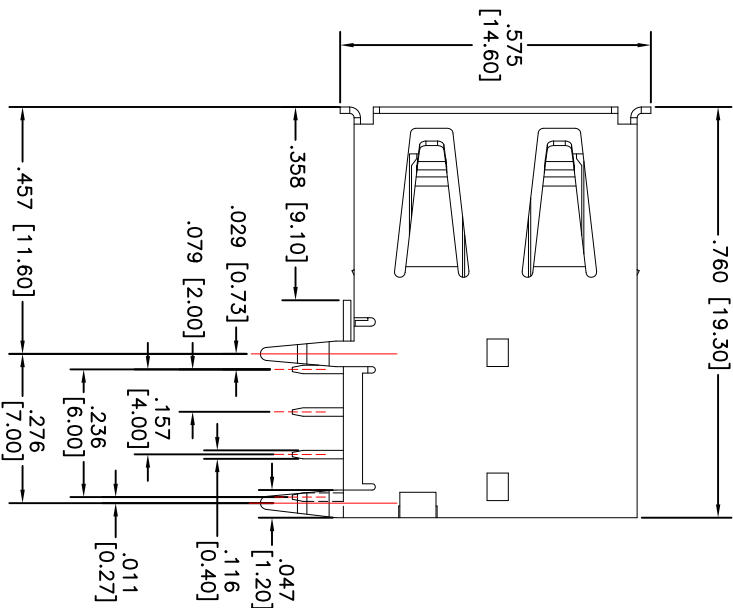


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/1/05	
A		REVISED DIM.	1/25/10	
B		REVISED SHAPE	12/16/10	
C		REVISED SPEC.	10/27/11	
D		REVISED SPEC.	9/3/12	

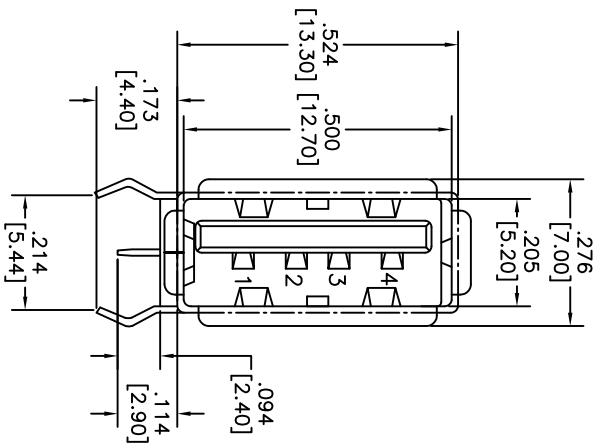

RECOMMENDED PCB LAYOUT
(BOTTOM VIEW)

SPECIFICATIONS:

- Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Shell: Brass, Nickel plated
Rear Shell: SPCC, Nickel plated
Plating: Gold flash over Nickel underplate on contact area, Tin over Copper underplate on tails.
Electrical: Rated Voltage And Current: 1.5A At 250VAC Minimum.
Contact resistance: 30 mohms max
Insulation resistance: 100 Mohms min
Dielectric withstanding voltage: 750 VAC for 1 minute..
Temperature Rating: Operating temperature: -55°C to +85°C
Environmental: Lead free, RoHS compliant



ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

USB, TYPE A, RIGHT ANGLE UPRIGHT
THRU-HOLE, SELECTIVE GOLD

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES				ADAM TECH			
.X ± .10 .XX ± .020 .XXX ± .015	ØX ± .10 ØXX ± .015 ØXXX ± .010			909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
APPROVALS		DATE		TITLE			
DRAWN	SS	12/1/05		USB, TYPE A, RIGHT ANGLE UPRIGHT THRU-HOLE, SELECTIVE GOLD			
CHECKED				SIZE		PART NO.	
APPROVED				X		USB-A-S-RU-HT	
				REF: S00095T		SCALE: NTS	
						SHEET 1 OF 1	
						REV. D	