


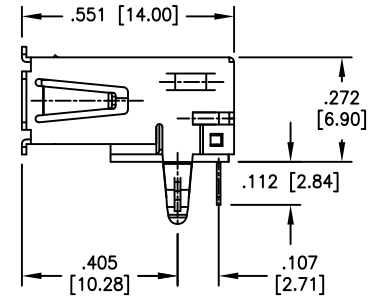

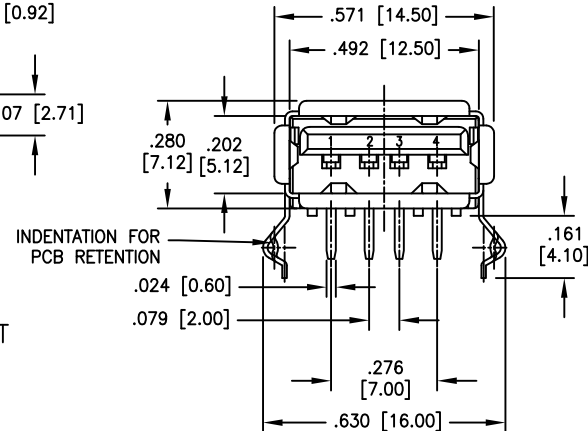


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/3/04	
A		RE-DESIGNED SHELL AND INSULATOR	1/06/06	
B		UPDATE DRAWING	12/22/15	AY/SL
C		UPDATE CURRENT RATING	3/22/16	AY/YC

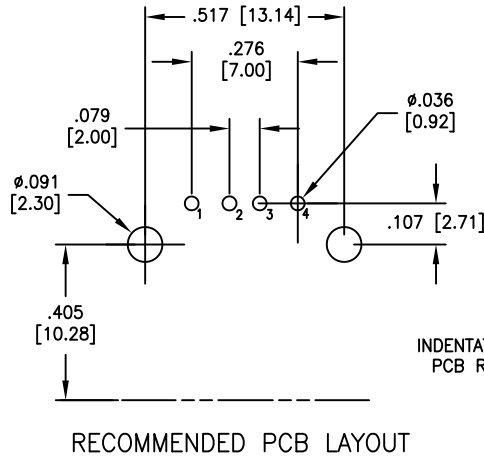

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: White

Contacts: Copper Alloy

Shell: Copper Alloy, Nickel plated

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Copper underplate on PCB tails

Electrical:

Voltage rating: 30 VAC

Current rating: 1.5 Amp @ 250V AC

Contact resistance: 30 mohms max.

Insulation resistance: 1000 Mohms min. @ 500 VDC

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

Operating temperature: -20°C to +60°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS

DATE

DRAWN

SS

10/4/04

CHECKED

APPROVED

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

UNIVERSAL SERIAL BUS

SINGLE PORT, RIGHT ANGLE, PCB

SIZE

X

PART NO.

USB-A-S-RA-WT

REV.

C

REF: S00005C

SCALE: NTS

SHEET 1 OF 1