
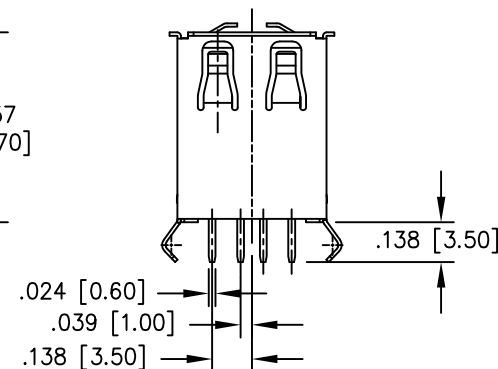
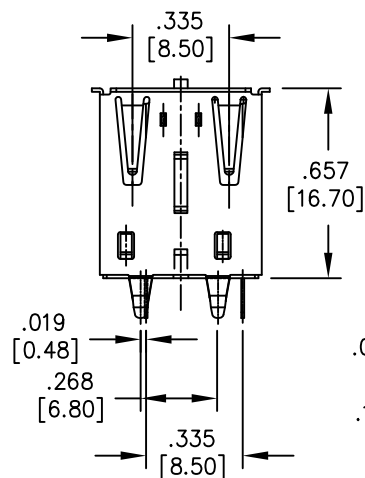
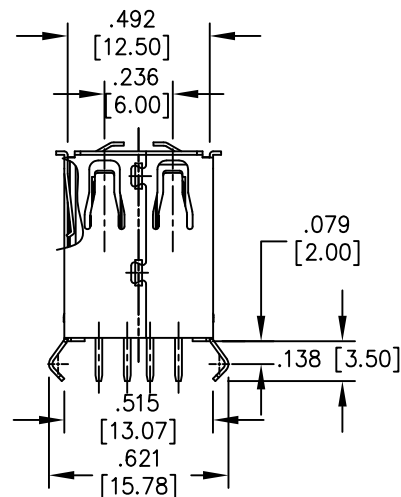
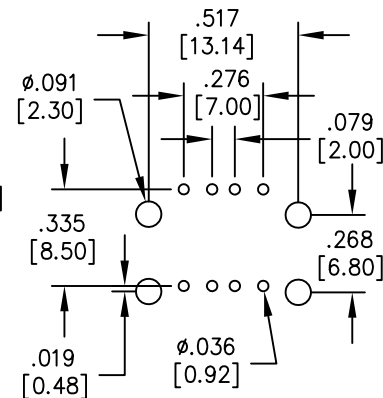
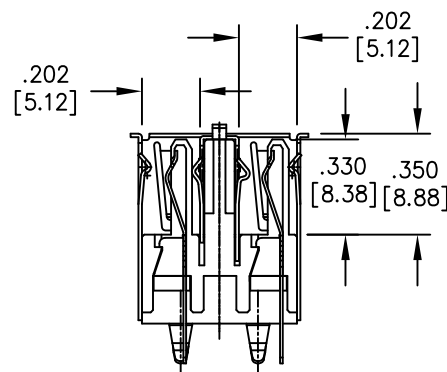


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/25/12	
A		UPDATED SPEC.	9/30/16	HR/YC

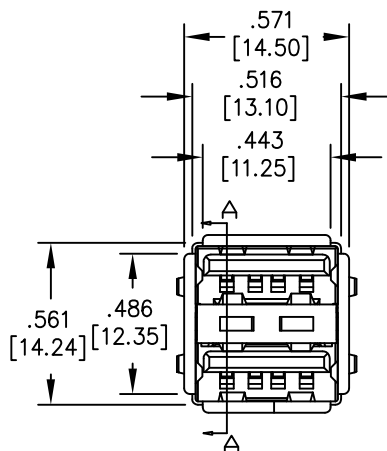

SPECIFICATIONS:

Material:

Insulator: PBT, Glass filled, rated UL 94V-0

Insulator color: White

Contacts: Phosphor Bronze

Shell: Steel, nickel plated

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Nickel underplate on PCB tails

Electrical:

Voltage rating: 30 V

Current rating: 1.5 Amp @ 250 VAC

Contact resistance: 30 mohms max.

Insulation resistance: 1000 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS

DATE

DRAWN

AY

7/25/12

CHECKED

AH

7/25/12

APPROVED

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

UNIVERSAL SERIAL BUS
DUAL PORT, VERTICAL, PCB

SIZE

PART NO.

USB-A-D-VT-WT

REV.

A

REF: S00005C

SCALE: NTS

SHEET 1 OF 1