

6

5

4

3


2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/12/19	

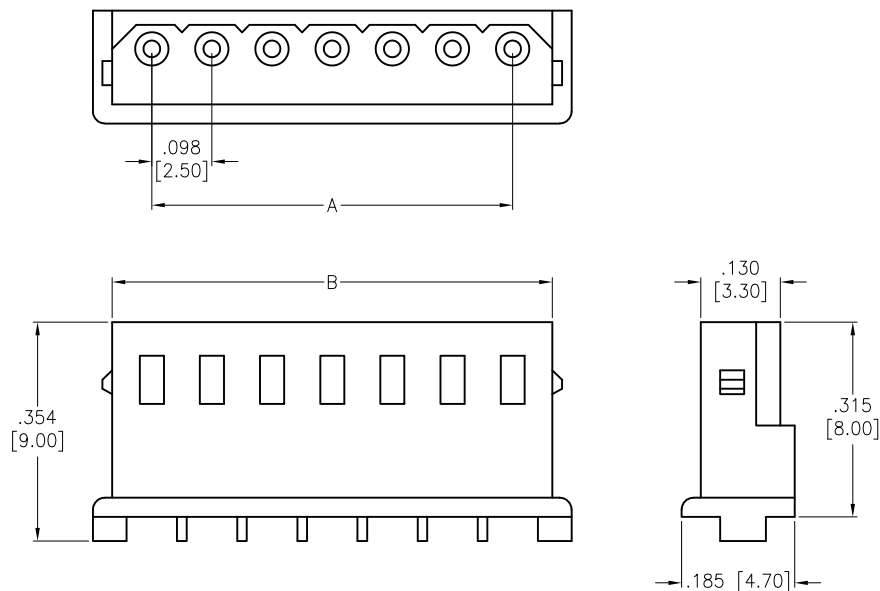

SPECIFICATIONS:

Material:

Insulator: Nylon66, UL 94V-0

Insulator color: Beige

Electrical:

Voltage rating: 250 VAC/DC

Current rating: 3 A AC/DC

Contact resistance: 20 mohms max.

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 800V AC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant

Positions: 02 thru 16

A = .098 [2.50] x No. of Spaces

B = .098 [2.50] x No. of Spaces + .130 [3.30]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	∅.X	± .10
.XX	± .020	∅.XX	± .015
.XXX	± .015	∅.XXX	± .010

ADAM TECH INTERCONNECTS

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE			
.098 [2.50] SHROUDED CRIMP THERMINAL HOUSING			
SIZE	PART NO.	REV.	
X	25CH-E6-XX	-	
REF:	S00015T	SCALE: NTS	SHEET 1 OF 1

APPROVALS		DATE
DRAWN	AY	8/12/19
CHECKED	RC	8/12/19
APPROVED		



6

5

4

3

2

1