

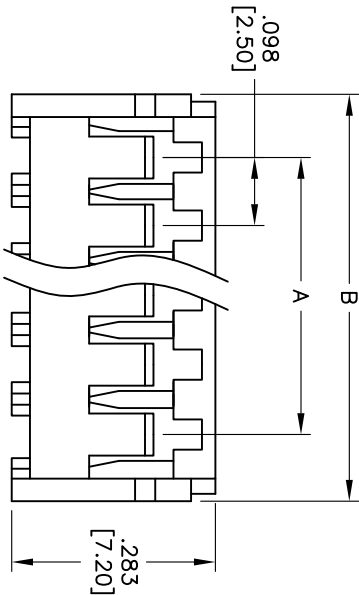


| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|---------|-------|
| - | | RELEASED | 4/13/06 | |
| A | | REDRAWN | 1/10/14 | AV/LL |

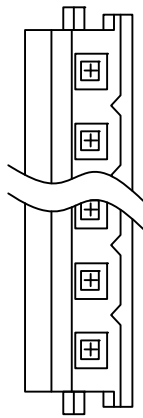

Positions: 2 thru 15
 A = .098 [2.50] x No. of Spaces
 B = .098 [2.50] x No. of Spaces + .169 [4.30]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLEES

| | | | |
|------|--------|------|--------|
| .X | ± .10 | ØX | ± .10 |
| .XX | ± .020 | ØXX | ± .015 |
| .XXX | ± .015 | ØXXX | ± .010 |

APPROVALS DATE

DRAWN LFS 4/13/06

CHECKED

APPROVED

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 WIRE TO BOARD PITCH: 2.5MM
 CRIMP HOUSING

SIZE PART NO.
 X 25CH-C-XX

REF: S00016T SCALE: NTS SHEET 1 OF 1 REV. A

APPROVED: _____
 DATE: _____ TITLE: _____

SPECIFICATIONS:
 Material: Nylon 66 UL 94V-0
 Insulator color: White
 Contact: Brass
 Electrical:
 Operating voltage: 250 V AC/DC
 Current rating: 3A AC/DC
 Insulation resistance: 1,000Mohms Min.
 Dielectric withstanding voltage: 800V AC for 1 MIN.
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, ROHS compliant

