

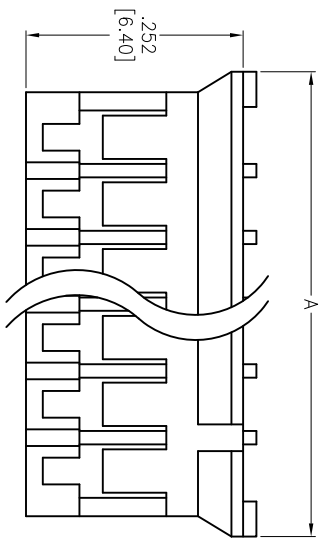


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/6/05	
A		REDRAWN	11/16/11	
B		REVISED SPEC.	1/8/13	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

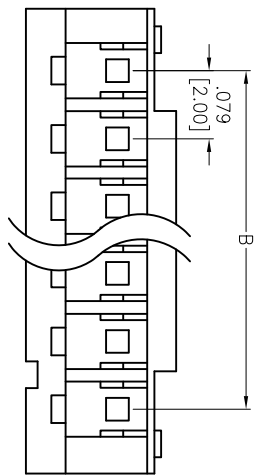

**SPECIFICATIONS:**  
 Material: Nylon 66, rated UL 94V-2  
 Insulator color: White  
 Electrical:  
 Operating voltage: 150 VAC max  
 Current rating: 1 Amp max  
 Insulation resistance: 1,000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 800 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -25°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant

Positions: 2 thru 20  
 A = .079 [2.00] x No. of Spaces + .150 [3.80]  
 B = .079 [2.00] x No. of Spaces

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] CRIMP HOUSING  
 LOW PROFILE, DUAL POLARIZED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		HOLE SIZE		DATE
.X	± .10	ØXX	± .10	
.XX	± .020	ØXXX	± .015	
.XXX	± .015	ØXXXX	± .010	
APPROVALS		DATE		
DRAWN	SS	4/6/05		
CHECKED				
APPROVED				

SIZE	PART NO.	REV.
X	2CH-C-XX	B
REF:	S00016T	SCALE: NTS
SHEET 1 OF 1		



6 5 4 3 2 1