

6

5

4

3


2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/07	
A		REVISED COLOR	6/21/10	

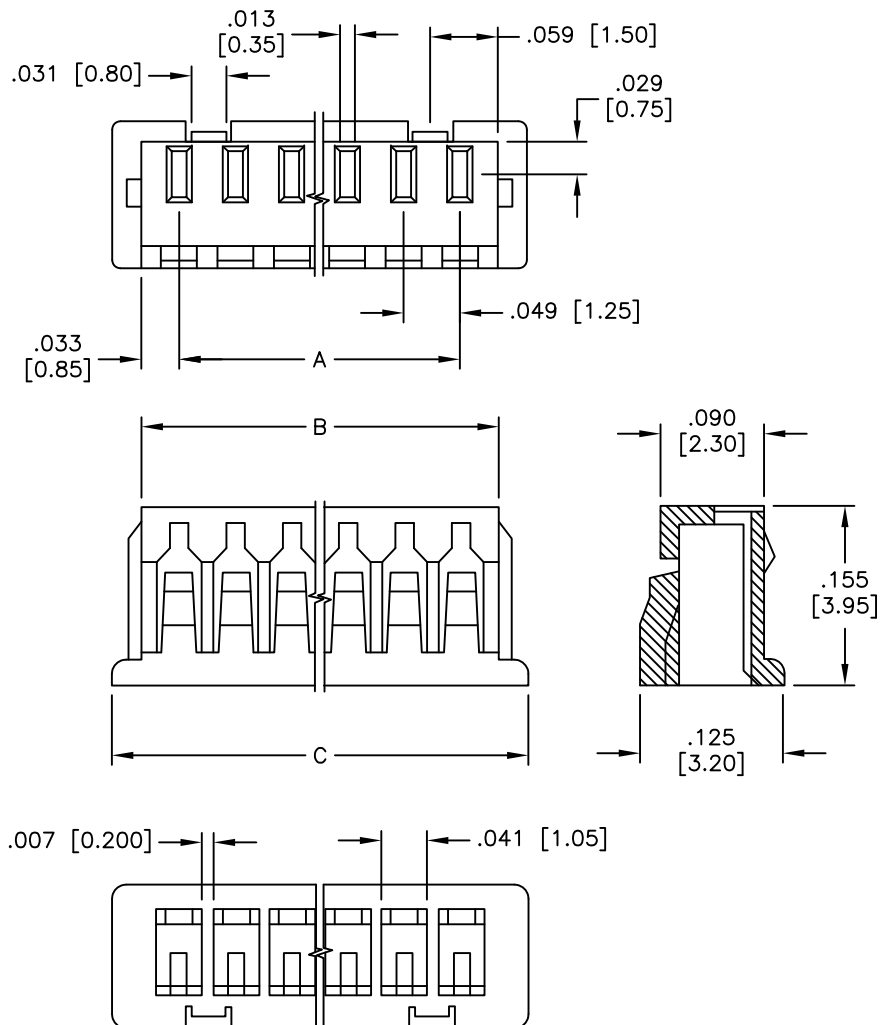

A = .049 [1.25] X NO. OF SPACES  
 B = .049 [1.25] X NO. OF SPACES + .066 [1.70]  
 C = .049 [1.25] X NO. OF SPACES + .118 [3.00]

SPECIFICATIONS:

Material:  
 Insulator: Nylon 66, rated UL 94V-0  
 Insulator color: White

Electrical:  
 Operating voltage: 250 VAC max  
 Current rating: 1 Amp max  
 Contact resistance: 20 mohms max.  
 Insulation resistance: 1,000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:  
 Operating temperature: -40°C to +85°C

Environmental:  
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

# ADAM TECH

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE		1.25mm HOUSING	
SIZE	PART NO.	REV.	
X	125CH-B-XX	A	
REF:	SCALE: NTS	SHEET 1 OF 1	

APPROVALS		DATE
DRAWN	BW	01/17/07
CHECKED		
APPROVED		

6

5

4

3

2

1