


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/7/15	

APPROVED: _____
 DATE: _____ TITLE: _____

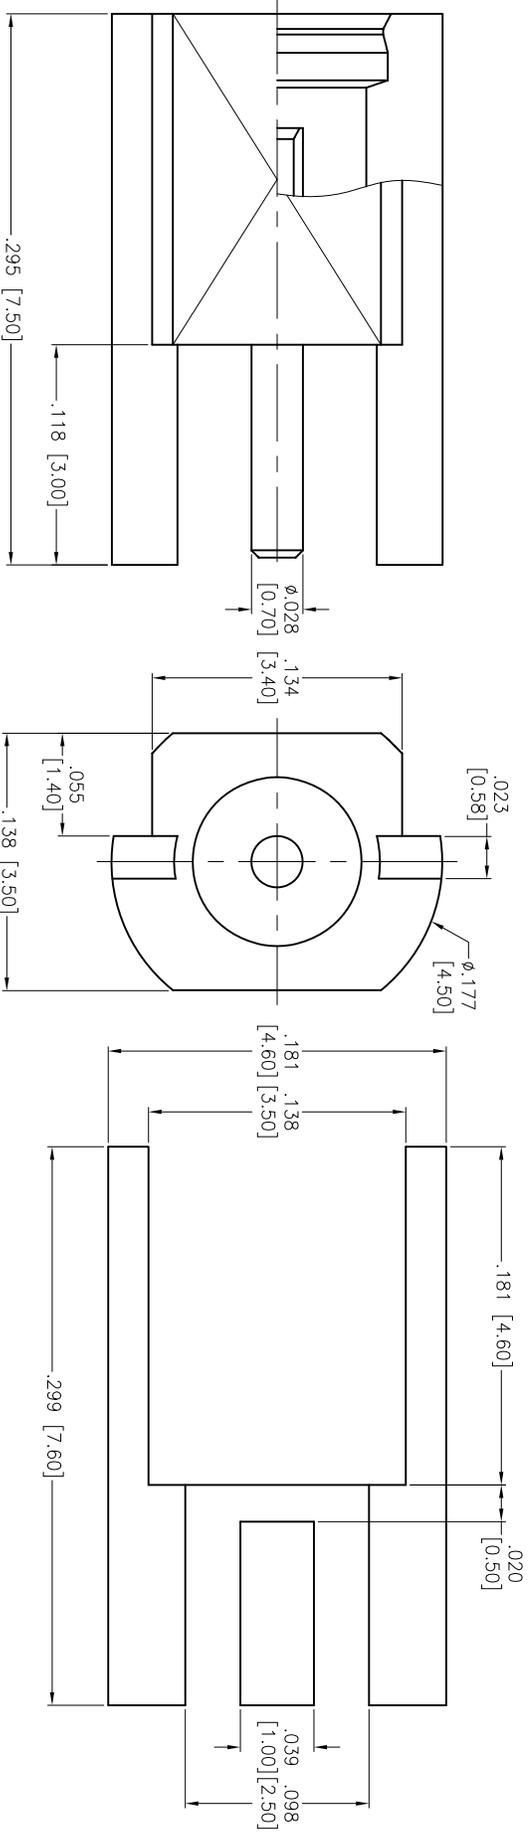

RECOMMENDED PCB LAYOUT

CONTACT PIN	BE CU	GOLD
INSULATOR	PTFE	WHITE
BODY	BRASS	GOLD
DESCRIPTION	MATERIAL	FINISH

SPECIFICATIONS:

Electrical:
 Nominal Impedance: 50 ohms
 Frequency range: 0-6 GHz
 Working Voltage: 170 VOLTS Max
 Proof Voltage: 500 VOLTS
 Temperature Rating:
 Operating temperature: -55°C to +155°C
Environmental:
 Lead free, RoHS compliant.

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010

INCHES HOLEES

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

RF CONNECTOR, TYPE NMCX STR.
50 OHM, EDGE CARD MOUNT JACK

APPROVALS	DATE	SIZE	PART NO.	REV.
DRAWN AY	8/7/15	X	RF-12-05A-1-00-50-G-1/R	-
CHECKED SY	8/7/15			
APPROVED		REF: S00277	SCALE: NTS	SHEET 1 OF 1



6 5 4 3 2 1

6 5 4 3 2 1