

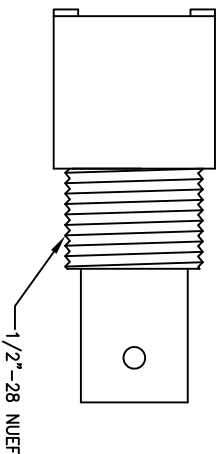
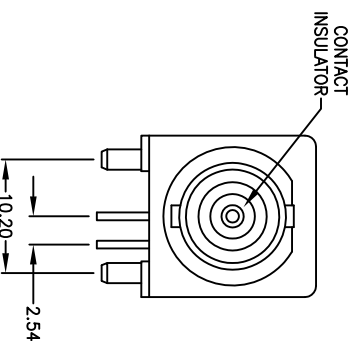


APPROVED: _____
DATE: _____ TITLE: _____



Rev	AWO #	Description	Date	Appr
-		RELEASED	5/19/05	
A		CHANGED ENGINEERING DESIGN	11/26/08	

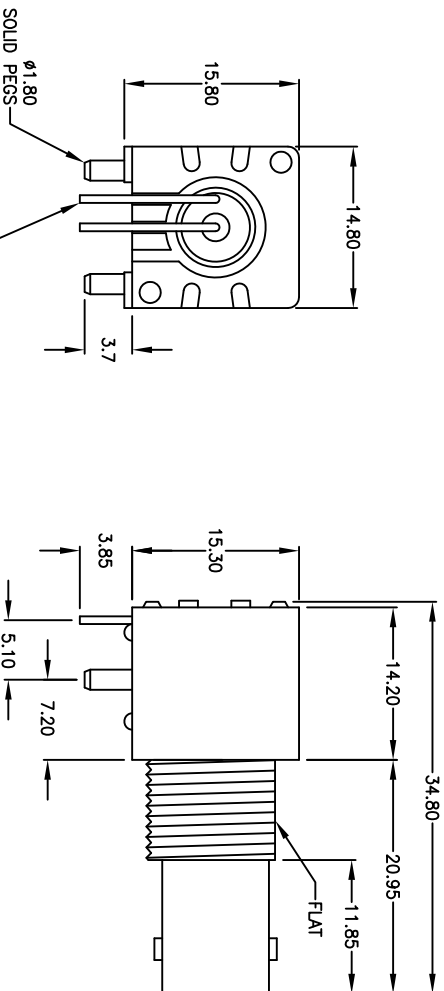

RECOMMENDED
PC Board Layout
Right Angle Mount



RECOMMENDED
PANEL CUTOUT

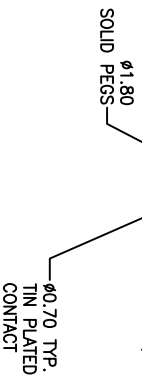

SPECIFICATIONS

Material:

Body: PBT, Color Black

Contact insulation: Polypropylene, color white.

Contacts: Phosphor Bronze, Gold and Tin plated.

Body: Polypropylene

Electrical

Nominal Impedance: 50 Ohms

Frequency Range: 0 – 4 GHz

Maximum Peak Voltage: 500V

Insulation Resistance: 5000 Mohms min @ 500 VDC

Dielectric Withstanding Voltage: 1500 VAC rms.

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

BNC, RIGHT ANGLE, 50 ohm

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED				TITLE			
INCHES	HOLES						
.X ± .10	Ø.X	± .10					
.XX ± .020	Ø.XX	± .015					
.XXX ± .015	Ø.XXX	± .010					
APPROVALS				DATE			
DRAWN	BAS		5/19/05				
CHECKED							
APPROVED							
SIZE				PART NO.			
X				RF-01A-P-00-50			
REF:				SCALE: NTS			
				SHEET 1 OF 1			
				REV. A			