
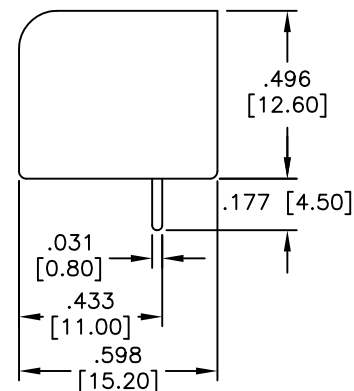
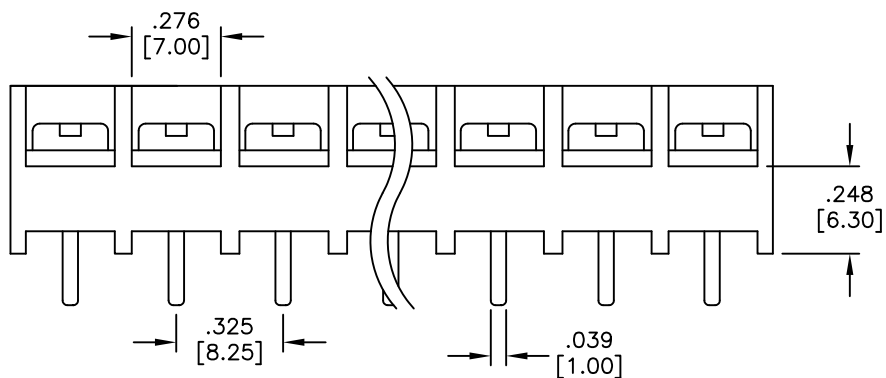



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/8/05	
A		REDRAWN	7/18/11	
B		REVISED DIM.	12/26/12	
C		CORRECTED DRAWING	3/15/16	SS
D		UPDATE SPEC.	1/25/18	AY/OC

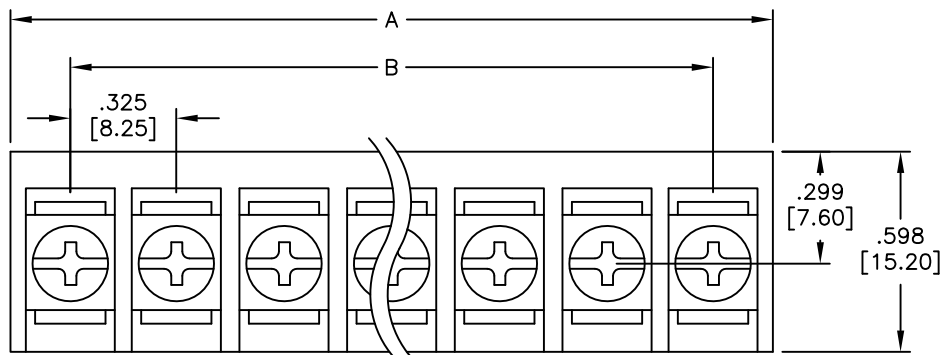

SPECIFICATIONS:

Material:

Insulator: Nylon 66

Insulator color: Black

Contact: Brass, Tin plated

Screw: Brass, M3, Nickel plated

Electrical:

Voltage rating: 300 VAC.

Current rating: 15 Amp.

Insulation resistance: 1000 Mohms min.

Mechanical:

Screw Torque Value: 10 Kg-cm

Wire range: 14 - 18 AWG Stranded

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 2 thru 32

A = .325 [8.25] x No. of Spaces + .404±.031 [10.25±0.80]

B = .325 [8.25] x No. of Spaces ± .020 [0.50]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		DATE		TITLE	
DRAWN	SS	6/8/05		.325 [8.25] CLOSED SIDE BARRIER BLOCK VERTICAL, PCB TAILS, BARRIER ENDS	
CHECKED				SIZE X	PART NO. TBE-XX-01-B
APPROVED				REV. D	
REF: S00031T		SCALE: NTS		SHEET 1 OF 1	