


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/23/10	

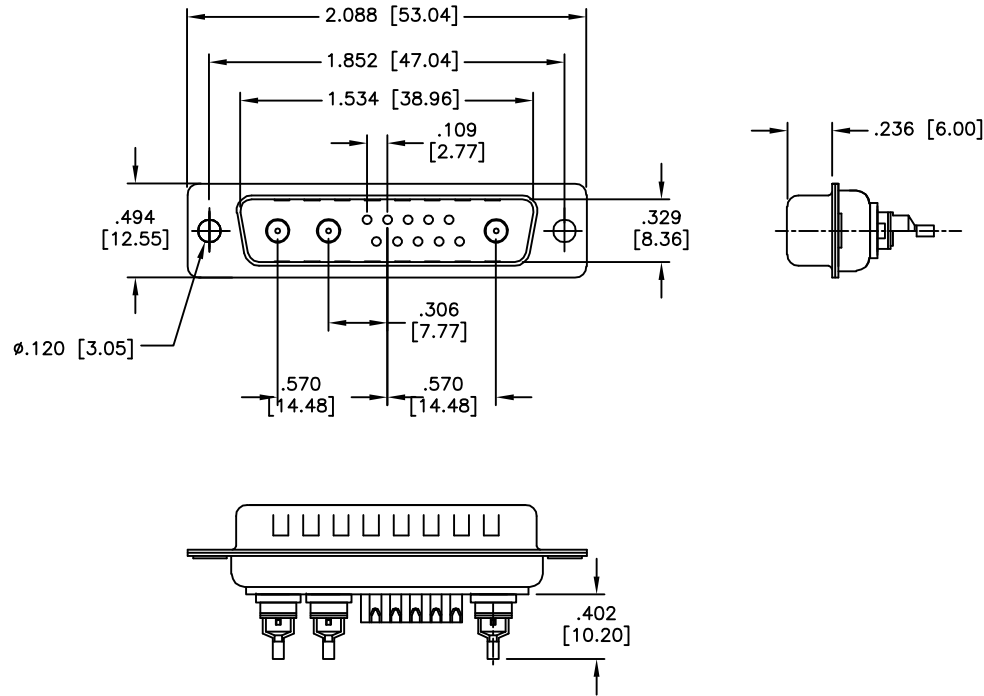

SPECIFICATIONS:

Material:

Insulator: Thermoplastic, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Shell: Steel, Tin plated

Hardware: Brass, Nickel plated

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Contact resistance: 10 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +125°C

Environmental:

Lead free, RoHS compliant



ADAM TECH PART NO.	IMPEDANCE
D13W3-PD-1-1	50 Ohm
D13W3-PD-2-1	75 Ohm

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X $\pm$.10 ϕ .X $\pm$.10
.XX $\pm$.020 ϕ .XX $\pm$.015
.XXX $\pm$.015 ϕ .XXX $\pm$.010

APPROVALS		DATE
DRAWN	AY	12/23/10
CHECKED	VW	12/23/10
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
D-SUB COAX PLUG, D13W3, STRAIGHT,
SOLDER TYPE

SIZE	PART NO.	REV.
X	D13W3-PD-X-1	-
REF:	S00019T	SCALE: NTS
SHEET 1 OF 1		