

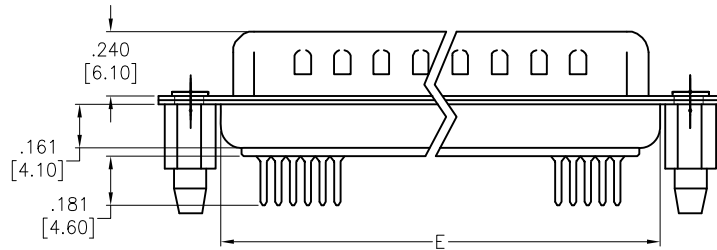
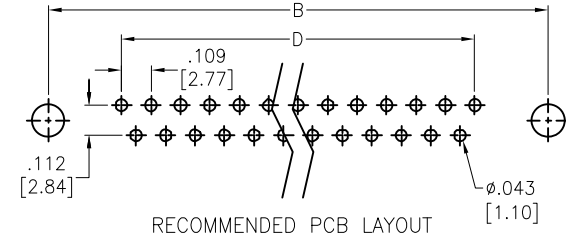


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/13/05	
A		REDRAWN	07/17/13	
B		UPDATED DRAWING	7/25/18	HR/MY

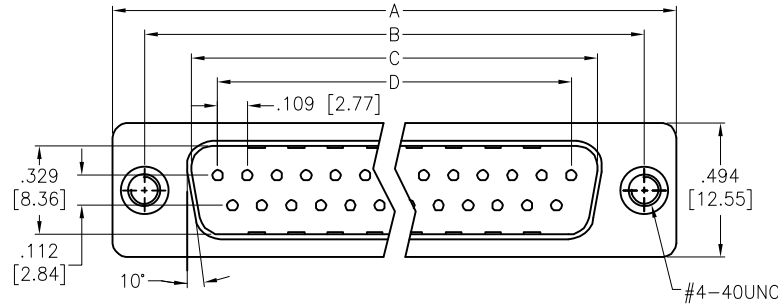

**SPECIFICATIONS:**

Material:  
 Insulator: PBT, Thermoplastic, glass filled, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Copper alloy  
 Shell: Steel, Tin plated  
 Boardlock: Brass, Tin plated  
 Plating:  
 Gold flash over Nickel underplate on contact area.  
 Electrical:  
 Voltage rating: 250 VAC/rms  
 Current rating: 3 Amp  
 Contact resistance: 20 mohms  
 Insulation resistance: 1,000 Mohms @ 500 VDC  
 Dielectric withstanding voltage: 1,000 VAC for 1 minute  
 Environmental:  
 Lead free, RoHS compliant.



DXXX	NO. OF CONTACTS	DIMENSIONS				
		A	B	C	D	E
DE09	9	1.213 [30.81]	.984 [24.99]	.666 [16.92]	.436 [11.08]	.756 [19.20]
DA15	15	1.543 [39.20]	1.311 [33.30]	.994 [25.25]	.763 [19.39]	1.091 [27.70]
DB25	25	2.088 [53.04]	1.852 [47.04]	1.534 [38.96]	1.309 [33.24]	1.618 [41.10]
DC37	37	2.732 [69.40]	2.500 [63.50]	2.182 [55.42]	1.963 [49.86]	2.256 [57.30]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	
DRAWN	DATE
CHECKED	
APPROVED	

**ADAM TECH INTERCONNECTS**  
 909 Rahway Avenue,  
 Union, NJ 07083  
 Phone: 908-687-5000  
 Fax: 908-687-5710

TITLE D-SUB PLUG, STANDARD PROFILE RIVETED #4-40 STANDOFFS W/BOARDLOCKS		
SIZE X	PART NO. DXXX-PT-1-BL	REV. B
REF: S00087T	SCALE: NTS	SHEET 1 OF 1