

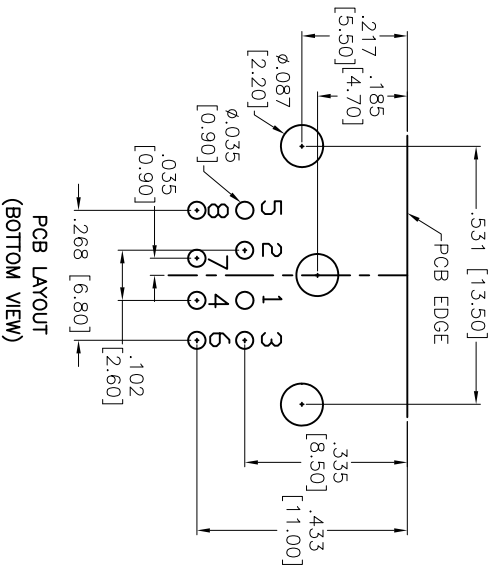
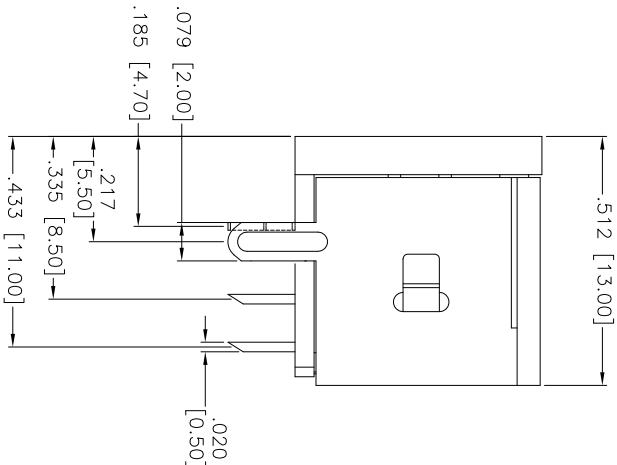


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/22/05	
A		REDRAWN	11/13/07	
B		REDRAWN	7/28/15	AY/MW

APPROVED: _____

DATE: _____ TITLE: _____

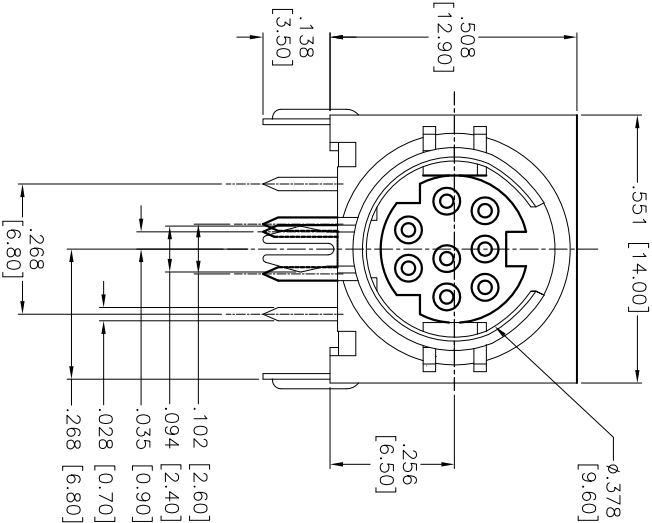

MATING FACE CONFIGURATIONS		
MDJ-003-S	MDJ-004-S	MDJ-005-S
MDJ-006-S	MDJ-007-S	MDJ-008-S

SPECIFICATIONS:

Material: Insulator: PBT, Glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shell: SPCC, Nickel plated

Ground terminal: Brass, Tin plated

Plating: Gold over Nickel underplate on contact area, Tin over Copper underplate on PCB tails

Electrical: Current rating: 1 Amp @ 100V AC, 2 Amps @ 12V DC.

Contact resistance: 30 mohms max

Insulation resistance: 100 Mohms min @ 500 VDC

Dielectric withstanding voltage: 250 VAC for 1 minute

Environmental: Lead free, RoHS Compliant



ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

MINI DIN JACK, RIGHT ANGLE, SHIELDED

2 THRU 8 POSITION, PCB MOUNT

UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	
.X	± .10
.XX	± .020
.XXX	± .015
.XXX	± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

TITLE	
MINI DIN JACK, RIGHT ANGLE, SHIELDED	
2 THRU 8 POSITION, PCB MOUNT	
SIZE	PART NO.
X	MDJ-00X-S
REF: S00095T	SCALE: NTS
SHEET 1 OF 1	REV. B