



APPROVED: _____ TITLE: _____
 DATE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/30/05	
A		ADDED DIM.	11/3/11	
B		ADDED DIM. & SHAPE	6/6/12	

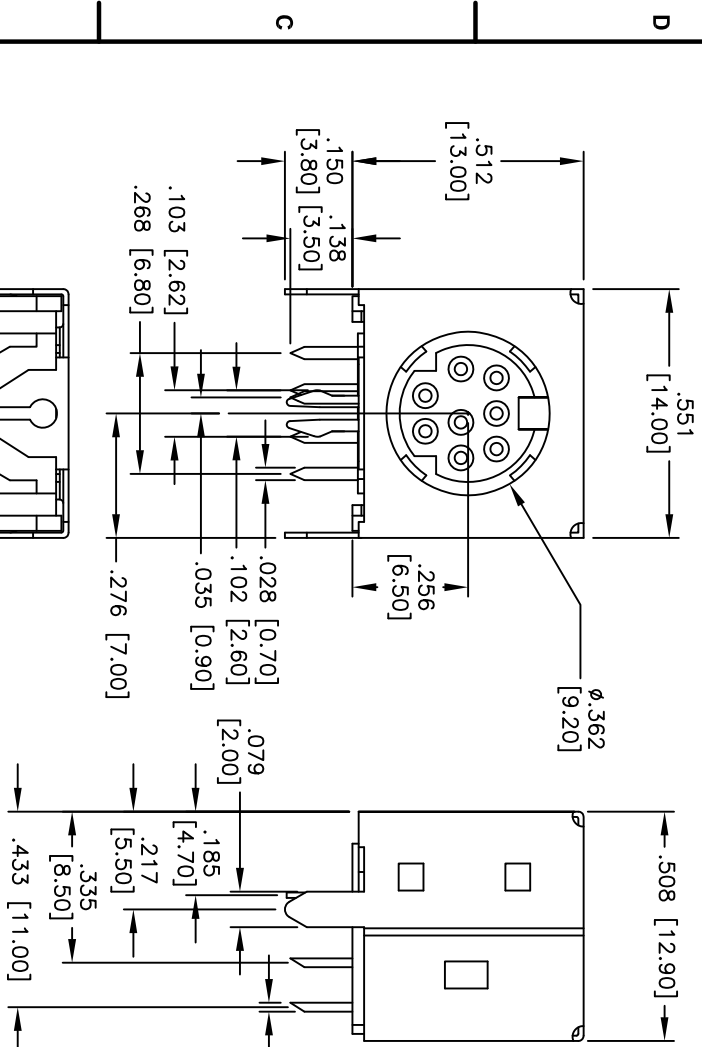

SPECIFICATIONS:

Material:
 Insulator: PBT, glass filled, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Shield: Copper Alloy, Tin plated
 Plating:
 Gold over Nickel underplate on contact area,
 Tin over Copper underplate on tails
Electrical:
 Operating voltage: 100 VAC/12 VDC max.
 Current rating: 1 Amp max./2 Amps max.
 Contact resistance: 30 mohms max. initial
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding voltage: 250 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +70°C
Environmental:
 Lead free, RoHS compliant.

MATING FACE CONFIGURATIONS

MDJ-003-FS	MDJ-004-FS	MDJ-005-FS	MDJ-006-FS	MDJ-007-FS	MDJ-008-FS

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

MINI DIN JACK, RIGHT ANGLE, FULL SHIELD

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		HOLE SIZES		DATE	
X	± .10	ØXX	± .10		
XX	± .020	ØXXX	± .015		
XXX	± .015	ØXXXX	± .010		
DRAWN		SS	12/30/05	TITLE	
CHECKED				SIZE	PART NO.
APPROVED				X	MDJ-00X-FS
				REF: S0003T	SCALE: NTS
					SHEET 1 OF 1

