


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/14/05	

APPROVED: _____
 DATE: _____ TITLE: _____

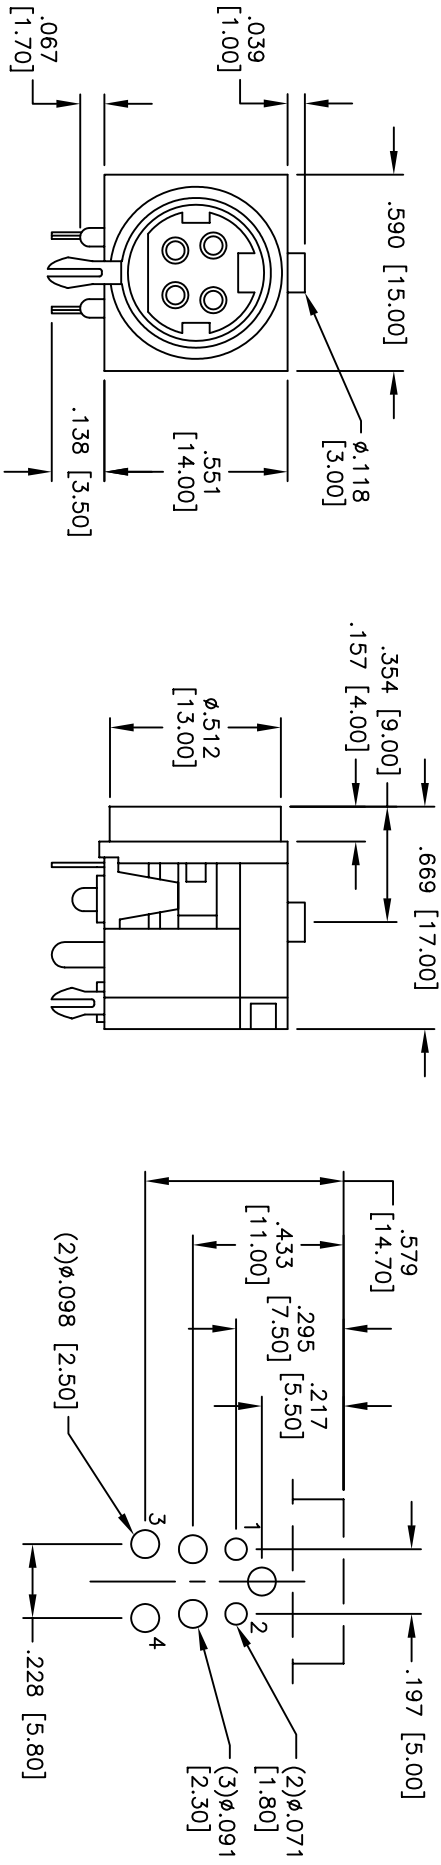

PCB LAYOUT
(Top View)

SPECIFICATIONS:

- Material: Insulator: PBT, glass filled, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Shield: Copper Alloy, Tin plated
- Plating: Silver over Nickel underplate overall

- Electrical: Operating voltage: 30 VDC max.
- Current rating: 7 Amps max.
- Contact resistance: 20 mohms max. initial
- Insulation resistance: 250 Mohms min.
- Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating: Operating temperature: -25°C to +70°C

- Environmental: Lead free, RoHS compliant.
- Recommended soldering temp: 235 for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **MINI DIN POWER JACK**
ALL POWER CONTACTS

SIZE	PART NO.	REV.
X	MPJ-4P	-
REF:	SCALE: NTS	SHEET 1 OF 1