


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/6/05	
A		REVISED SHAPE	7/03/08	
B		REDRAWN	7/03/09	

APPROVED: _____
DATE: _____ TITLE: _____

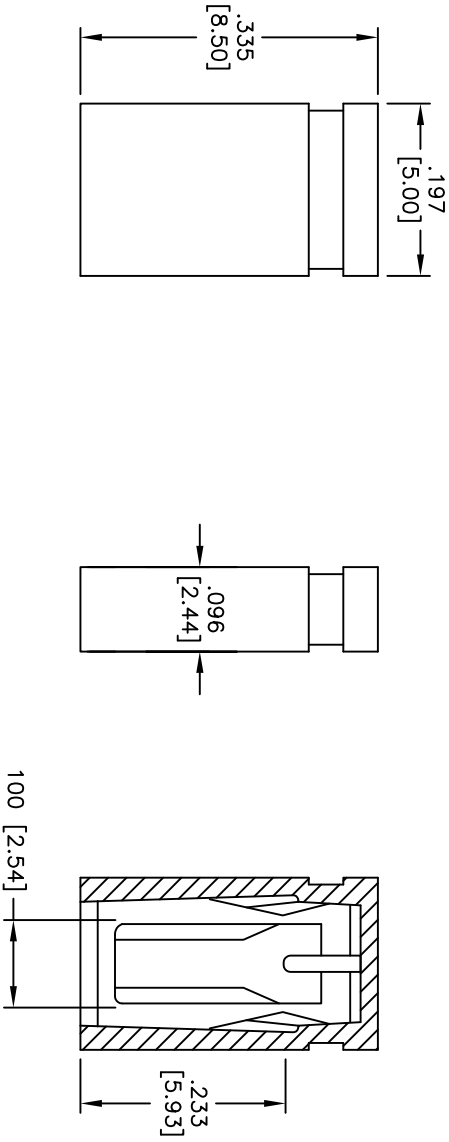

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
G = Gold flash over Nickel underplate overall
T = Tin over Copper underplate overall
Electrical:
Current rating: 3 Amp max
Contact resistance: 30 mohms max
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 650 VAC for 1 minute
Temperature Rating:
Operating temperature: -55°C to +105°C
Environmental:
Lead free, RoHS compliant

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.100 [2.54] MINI SHUNT, CLOSED TOP
.335 [8.50] HEIGHT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
HOLES							
.X	± .10	Ø.X	± .10				
.XX	± .020	Ø.XX	± .015				
.XXX	± .015	Ø.XXX	± .010				
APPROVALS			DATE				
DRAWN	SS	4/6/05					
CHECKED							
APPROVED							
SIZE		PART NO.					
X		MSDA-X					
REF:	S00076T	SCALE:	NTS	SHEET	1	OF	1
				REV.	B		
.100 [2.54] MINI SHUNT, CLOSED TOP .335 [8.50] HEIGHT							