

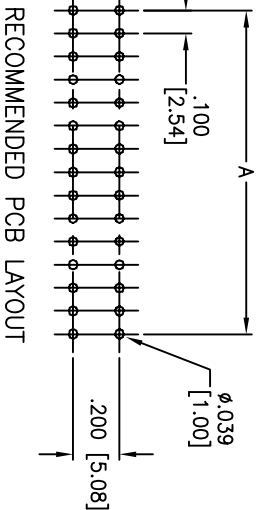
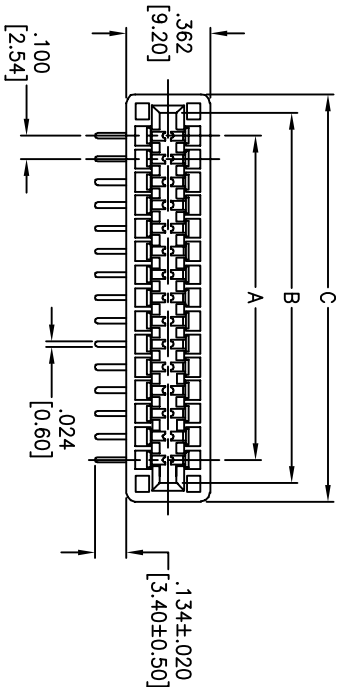


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	02/16/05	
A		ADDED RoHS TO SPECIFICATION	03/14/05	
B		REVISED SHAPE	10/06/08	
C		REVISED DIM.	10/07/09	
D		REVISED SHAPE	2/5/15	AV/LL

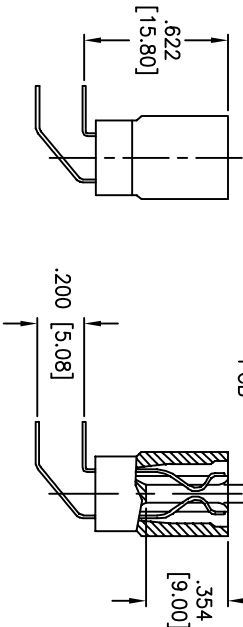

RECOMMENDED PCB LAYOUT

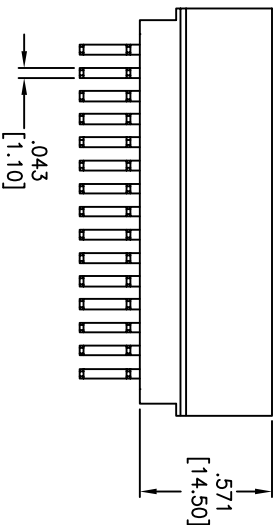

SPECIFICATIONS:

Material: Insulator: PBT, Glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy
Plating: Gold flash over Nickel underplate on contact area,
Tin over Copper underplate on PCB tails
Electrical: Current rating: 3 Amps max.
Contact resistance: 20 mohms max. initial
Insulation resistance: 5,000 Mohms min.
Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating: Operating temperature: -55°C to +85°C
Environmental: Lead free, RoHS compliant

Positions: 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96
A = .100 [2.54] x No. of Spaces
B = A + .200 [5.08]
C = A + .360 [9.14]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

CARD EDGE CONNECTOR, RIGHT ANGLE
.100" PITCH, PCB

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				ADAM TECH 909 Railway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
.X ± .10 .XX ± .020 .XXX ± .015		ØX ± .10 ØXX ± .015 ØXXX ± .010		TITLE CARD EDGE CONNECTOR, RIGHT ANGLE .100" PITCH, PCB			
APPROVALS		DATE					
DRAWN	SS	02/16/05					
CHECKED				SIZE PART NO. CERA-XX-U			
APPROVED				REF: S00043T SCALE: NTS SHEET 1 OF 1 REV. D			