


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	02/16/05	
A		REVISED & REDRAWN	9/10/08	
B		REDRAWN	12/16/11	
C		UPDATE DRAWING	2/26/15	AY/GC
D		UPDATE DRAWING	1/28/16	AY/SC
E		REVISED DIM.	4/20/16	AY

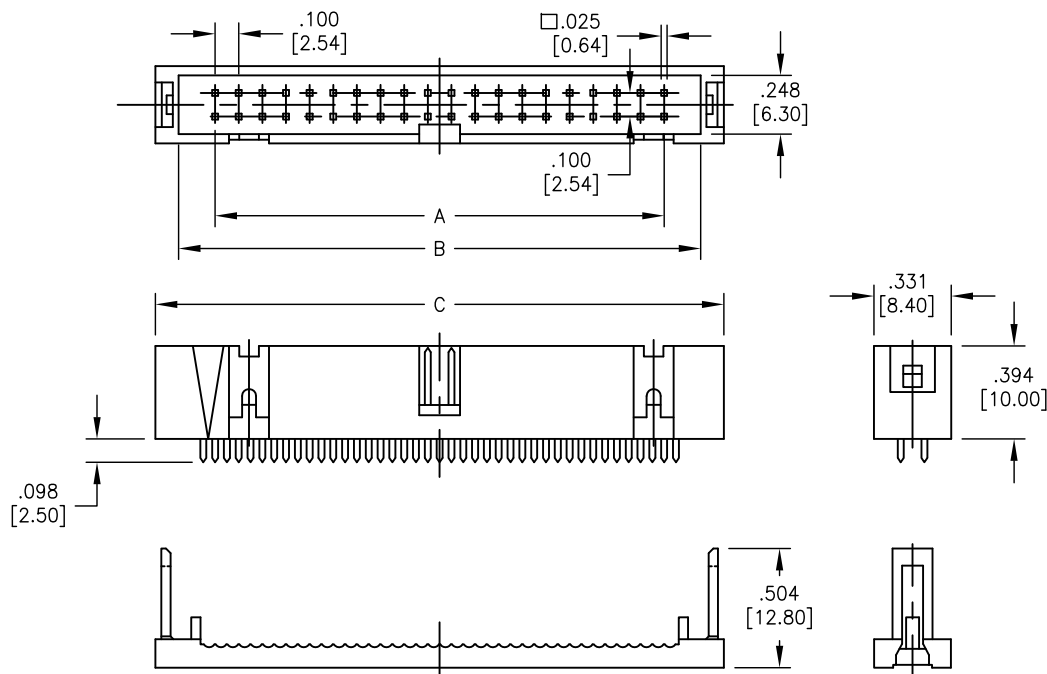

DIMENSIONS			
POS.	A	B	C
10	.400 [10.16]	.708 [18.00]	.905 [23.00]
14	.600 [15.24]	.908 [23.08]	1.105 [28.08]
16	.700 [17.78]	1.008 [25.62]	1.205 [30.62]
20	.900 [22.86]	1.208 [30.70]	1.405 [35.70]
24	1.100 [27.94]	1.408 [35.78]	1.605 [40.78]
26	1.200 [30.48]	1.508 [38.32]	1.705 [43.32]
30	1.400 [35.56]	1.708 [43.40]	1.905 [48.40]
34	1.600 [40.64]	1.908 [48.48]	2.105 [53.48]
40	1.900 [48.26]	2.208 [56.10]	2.405 [61.10]
50	2.400 [60.96]	2.708 [68.80]	2.905 [73.80]
60	2.900 [73.66]	3.208 [81.50]	3.405 [86.50]
64	3.100 [78.74]	3.408 [86.58]	3.605 [91.58]

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Gray

Contacts: Brass

Plating:

Gold Flash over Nickel underplate on contact area,

Tin over Copper underplate on IDC area.

Electrical:

Voltage rating:: 250 VAC

Current rating: 1 Amp

Contact resistance: 30 mohms max

Insulation resistance: 1,000 Mohms min@ 500VDC

Dielectric withstanding voltage: 500 VAC for 1 minute

Environmenta:

Lead free, RoHS Compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	SS	02/16/05
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.100" [2.54] IDC BOX HEADER
.100" X .100" CETERLINE

SIZE	PART NO.	REV.
X	FCP-XX-SG	E
REF:	S00087T	SCALE: NTS
SHEET 1 OF 1		