

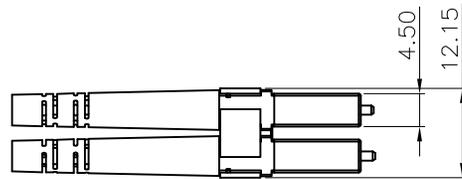
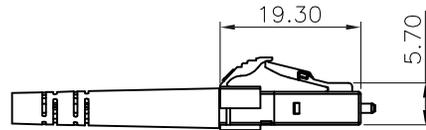


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/25/21	
A		UPDATE TOLERANCES	7/26/21	WX/RC
B		UPDATE DRAWING	8/4/21	LH/RC

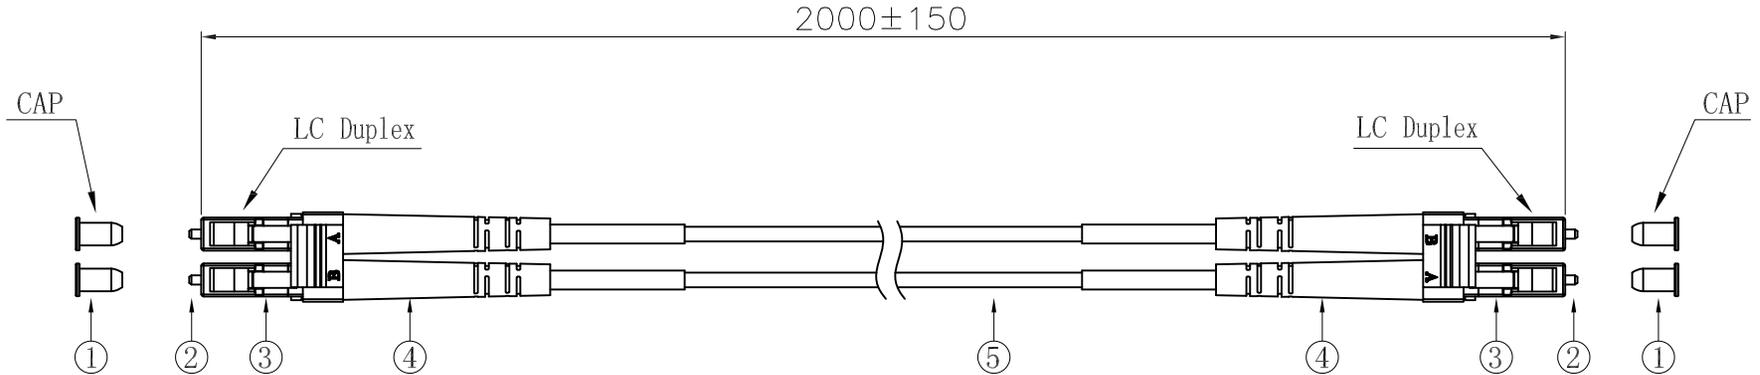

5	Fiber optic cable	Fiberglass Shuck PVC Water blue
4	LC Tail Sleeve	PVC White
3	LC Outer Shell	Plastic Gray
2	Ceramic core	Ceramic White
1	CAP	PP White
No.	Name	Material

SPECIFICATIONS:

Material:
 Cable: Engineering plastics, Colo: Water Blue
 Insert core: Zirconia ceramic
 Electrical:
 Standards of IEC,EIA/TIA, Telcordia
 Return loss: 40dB min
 Insertion loss: 0.3dB max
 Temperature Rating:
 Operating temperature: -25°C to +70°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED		
MM		
1~10	± 0.50	
11~30	± 1.00	
31~50	± 2.00	
51~200	± 5.00	
200~	± 7.00	
DRAWN	WX	5/25/21
CHECKED	JL	5/25/21
APPROVED		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION FROM ADAM TECH		



909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE		REV.
CUSTOM ASSEMBLY, OPTICAL LC ADAPTOR, 2 PORTS , PLUG W/STRAIN RELIEF		B
SIZE	PART NO.	
X	CA #OPLN2PNNC1NSR	
REF: S00005C	SCALE: NTS	SHEET 1 OF 1