

6

5

4

3





2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/9/20	

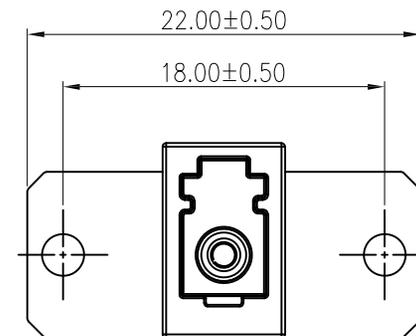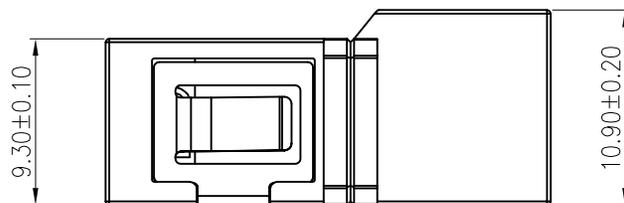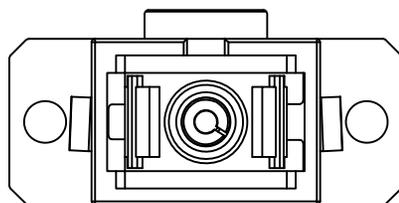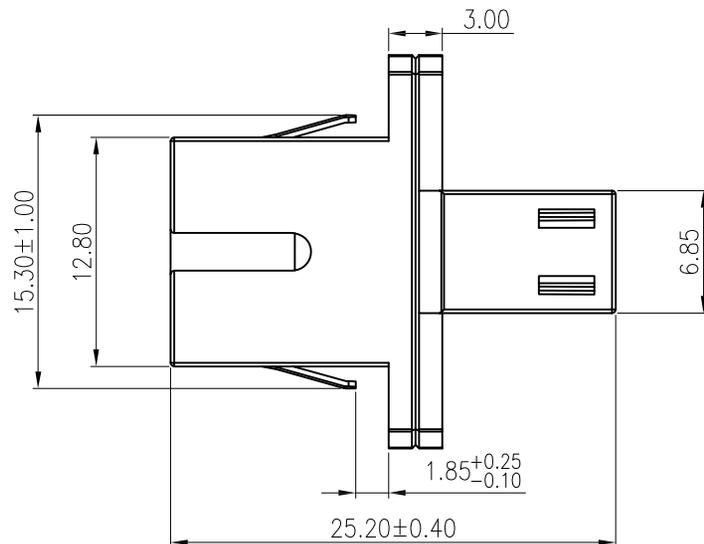

SPECIFICATIONS:

Material:
Housing: Alloy, rated UL 94V-0,
Sleeve: Zirconia ceramic
Electrical:
Repeatability: 1000 min times
Insertion loss: 0.3dB max
Interchangeability: 0.3dB max
Temperature Rating:
Operating temperature: -40°C to +85°C
Environmental:
Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

MM	ANGLE
X. ± 0.35	X.* ± 2°
.X ± 0.30	.X* ± 1°
.XX ± 0.25	.XX* ± 0.5°
.XXX ± 0.15	.XXX* ± 0.5°

ADAM TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

APPROVALS		DATE
DRAWN	LH	9/9/20
CHECKED	JL	9/9/20
APPROVED		

TITLE OPTICAL SC/LC ADAPTERS, 1 PORTS , LONG-EARED WITH CUCURBIT TYPE DUST CAP / LC DUST CAP		
SIZE X	PART NO. OPSLN1ANNC1P2A	REV. -
REF: S00005C	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1