

6

5

4





3

2

1

APPROVED: \_\_\_\_\_  
DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/8/20	

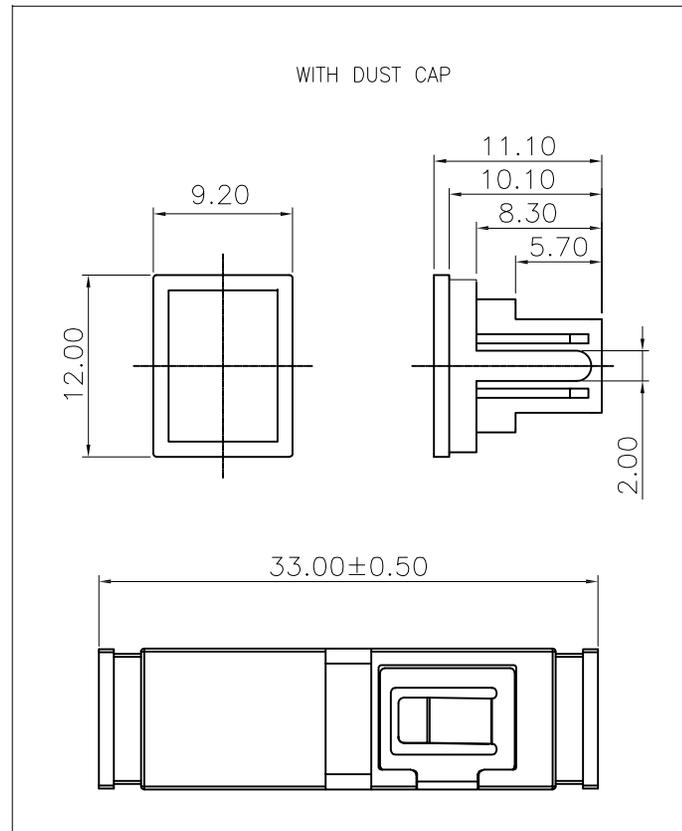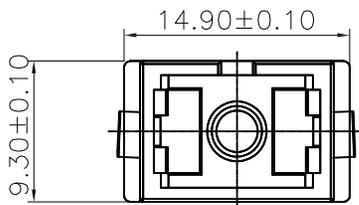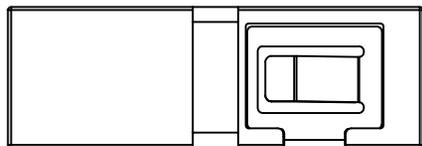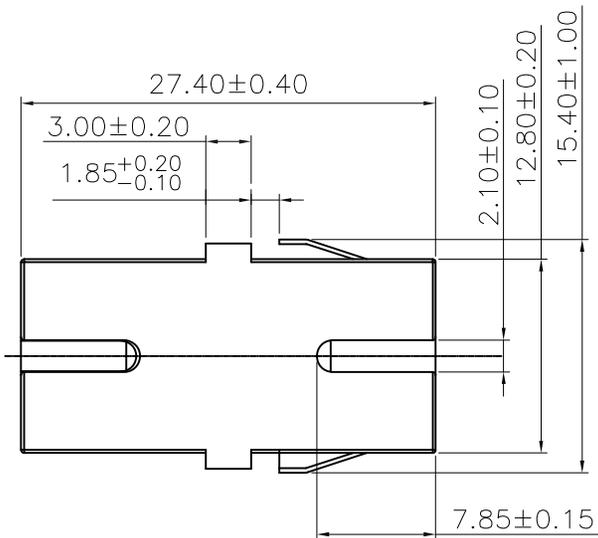

OPSA1BSNC1N1	SC/APC, W/O Panel Ground	7737C Green	PBT Black
OPSA1BSNC1P1	SC/APC, W/Panel Ground	7737C Green	PBT Black
OPSB1BSNC1N1	SC/PC, W/O Panel Ground	2184C Blue	PBT Black
OPSB1BSNC1P1	SC/PC, W/Panel Ground	2184C Blue	PBT Black
PART NUMBER	DESCRIPTION	Housing&Insert color	Cap Color

**SPECIFICATIONS:**

Material:  
Housing: PBT, rated UL 94V-0, Color: See Chart  
Cap: PBT, rated UL 94V-0, Color: Black  
Electrical:  
Standards of IEC, EIA/TIA, Telcordia  
Insertion loss: 0.2dB max  
Repeatability: 500 cycles min  
Temperature Rating:  
Operating temperature: -40°C to +85°C  
Environmental:  
Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE MILLIMETERS  
TOLERANCES: EXCEPT AS NOTED  
MM ANGLE  
.X ± 0.35 .X° ± 2°  
.X ± 0.30 .X° ± 1°  
.XX ± 0.25 .XX° ± 0.5°  
.XXX ± 0.15 .XXX° ± 0.5°

**ADAM TECH INTERCONNECTS** 909 Rahway Avenue,  
Union, NJ 07083  
Phone: 908-687-5000  
Fax: 908-687-5710

APPROVALS		DATE
DRAWN	LH	9/8/20
CHECKED	JL	9/8/20
APPROVED		

TITLE SC TYPE ADAPTER, APC&PC, 1 PORTS, SHORT EARS, WITH SC TWO TYPE DUST CAP, SOLID BLOCK			
SIZE X	PART NO. OPSX1BSNC1X1	REV. -	
REF: S00005C	SCALE: NTS	SHEET 1 OF 1	

6

5

4

3

2

1