

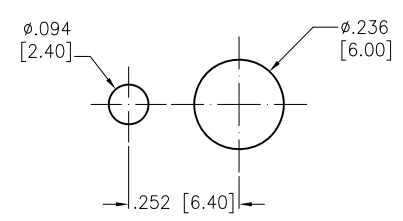
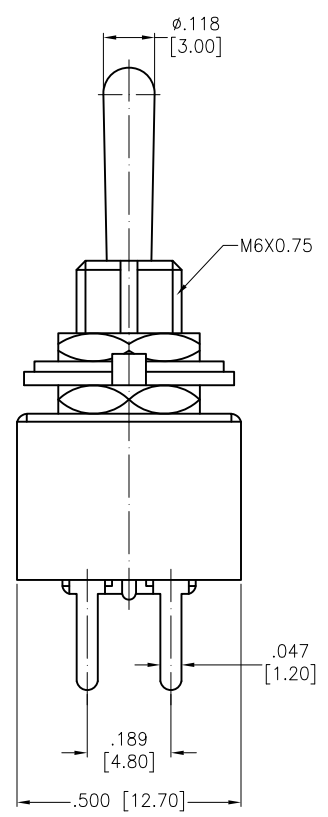


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/11/21	


APPROVED: _____
DATE: _____ TITLE: _____

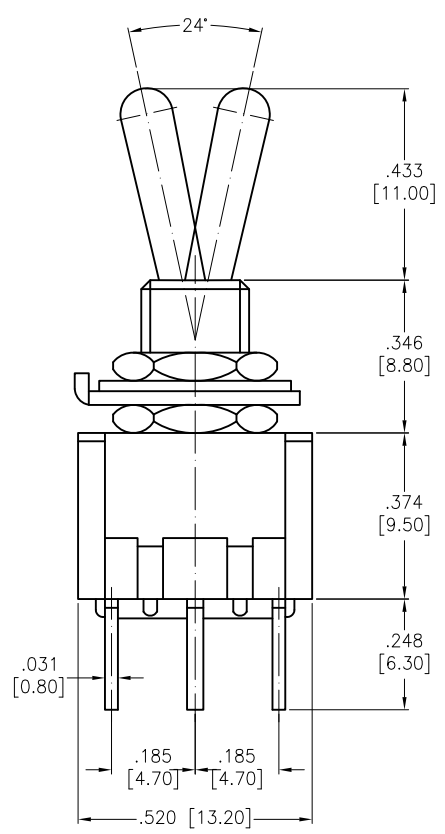


RECOMMENDED
PANEL CUT-OUT



(DPDT) ON-ON



2 WAY



3 WAY

- SW-T2-4X-B-A2-MA2
- B=ON-ON (2 WAY)
 - D=ON-(ON) (2 WAY)
 - E=ON-OFF-ON (3 WAY)
 - F=ON-OFF-(ON) (3 WAY)
 - G=(ON)-OFF-(ON) (3 WAY)
 - H=ON-ON-ON (3 WAY)

SPECIFICATIONS:

Material:
Body: Bakelite, Color: Black
Lever: Brass, Nickel plated
Terminal: Brass, Silver plated
Electrical:
Rating: 3A @ 250V AC
6A @ 125V AC
Contact resistance: 20 mΩ max
Insulation resistance: 1000 MΩ min (500VDC)
Dielectric withstanding voltage: 1500V AC for 1 minute
Electrical Life: 10,000 cycles
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	∅.X	± .10
.XX	± .020	∅.XX	± .015
.XXX	± .015	∅.XXX	± .010



909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

DRAWN	JJ	8/11/21
CHECKED	RC	8/11/21
APPROVED		

TITLE SWITCH, TOGGLE MINIATURE, DPDT, PCB VERTICAL TYPE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

SIZE X	PART NO. SW-T2-4X-B-A2-MA2	REV. -
REF: -	SCALE: NTS	SHEET 1 OF 1