


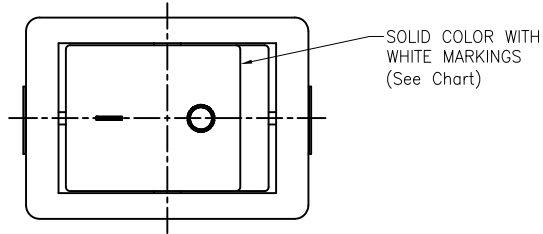


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/27/21	
A		UPDATE DRAWING	8/12/22	WX/AC1

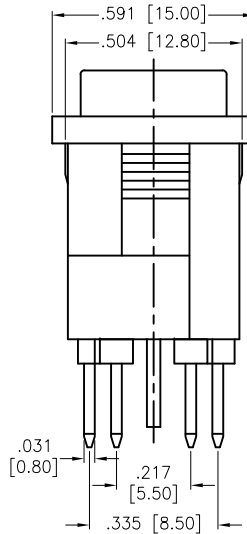

CIRCUIT DIAGRAM  
(DPST) ON-OFF

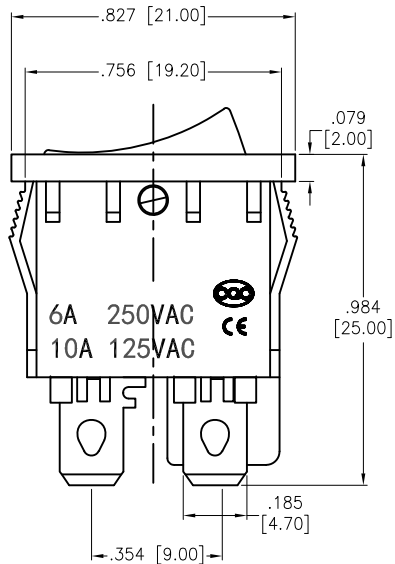

SW-R2-3A-F-X-4

	Actuator Markings
1	
2	
3	
4	
5	

Replace "x" in P/N with the corresponding switch color and marking

SPECIFICATIONS:

Material:  
 Body: Nylon 66, Color Black, Rated UL 94V-0  
 Terminal: Brass, Silver plated  
 Button: Nylon 66, Solid color Black, White color markings.  
 Electrical:  
 Rating: 10A @ 125V AC  
 6A @ 250V AC  
 Contact resistance: 50 mohms max  
 Insulation resistance: 100 mohms min  
 Dielectric withstanding voltage: 1500V AC  
 Electrical Life: 10,000 cycles min.  
 Temperature Rating:  
 Operating temperature: T85  
 Environmental:  
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	∅X	± .10
.XX	± .020	∅XX	± .015
.XXX	± .015	∅XXX	± .010



909 Rahway Avenue,  
 Union, NJ 07083  
 Phone: 908-687-5000  
 Fax: 908-687-5710

DRAWN	WX	10/27/21
CHECKED	RC	10/27/21
APPROVED		

TITLE SWITCH, ROCKER, DPST, ON-OFF, COLOR BLACK, PANEL MOUNT, .187" [4.8] SOLDER

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

SIZE X	PART NO. SW-R2-3A-F-X-4	REV. A
REF: S00206C	SCALE: NTS	SHEET 1 OF 1