


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/04/04	
A		REDRAWN	3/03/10	
B		REDRAWN	1/4/13	
C		UPDATE DIM.	3/21/19	AY/DH

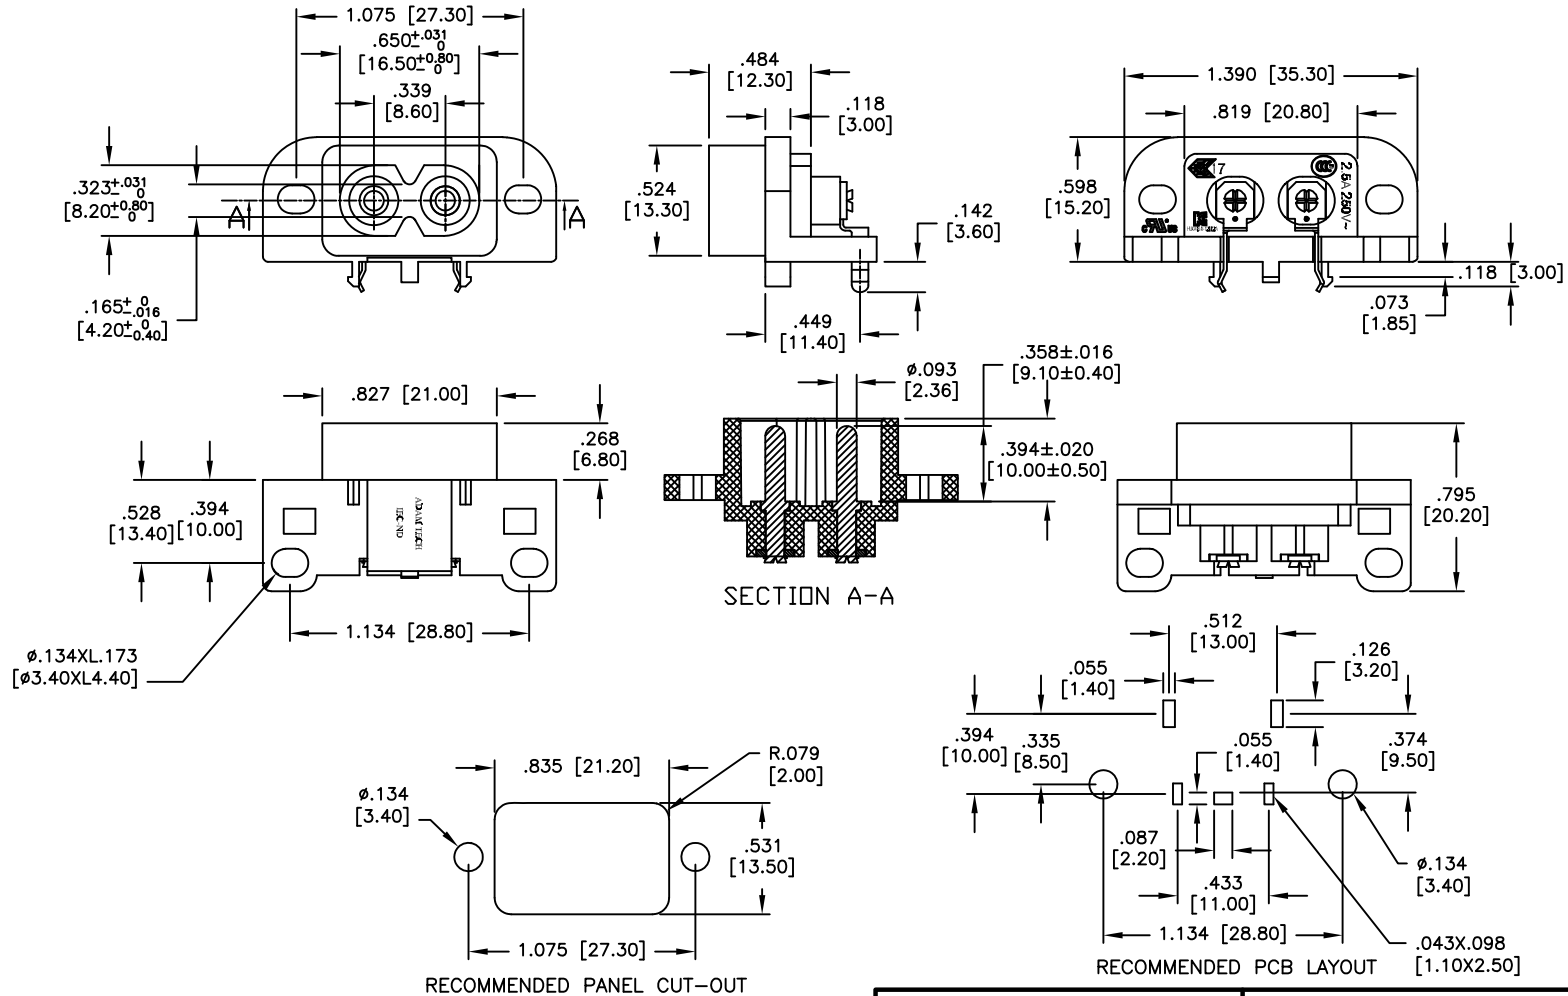

SPECIFICATIONS:

Material:
 Insulator: Nylon 66, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy, Tin Plated
 Center Pin: Copper Alloy, Nickel Plated
 Electrical:
 Rating: 2.5A @ 250V (C-ULus & ENEC & CCC & KC)
 Insulation resistance: 100 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 3000 VAC for 1 minute
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		
INCHES		
.X ±.10	∅X ±.10	HOLES
.XX ±.020	∅XX ±.015	
.XXX ±.015	∅XXX ±.010	
APPROVALS		DATE
DRAWN	SS	5/04/04
CHECKED		
APPROVED		

**ADAM
 TECH
 INTERCONNECTS**

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE IEC 60320, C8, RIGHT ANGLE, PCB TERMINAL, PANEL MOUNT		
SIZE X	PART NO. IEC-ND-4	REV. C
REF: S00087C	SCALE: NTS	SHEET 1 OF 1