

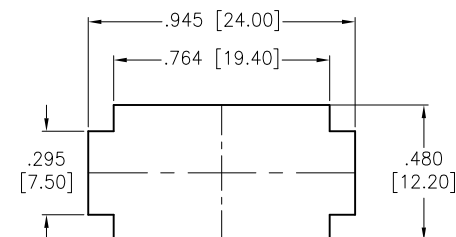
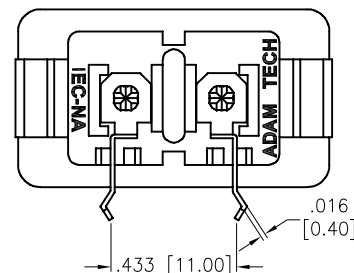
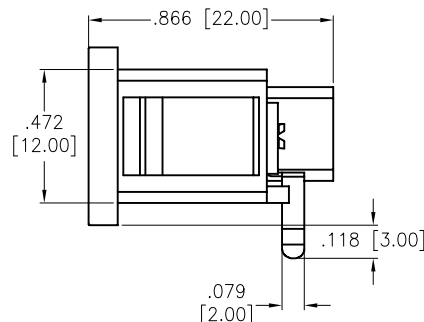
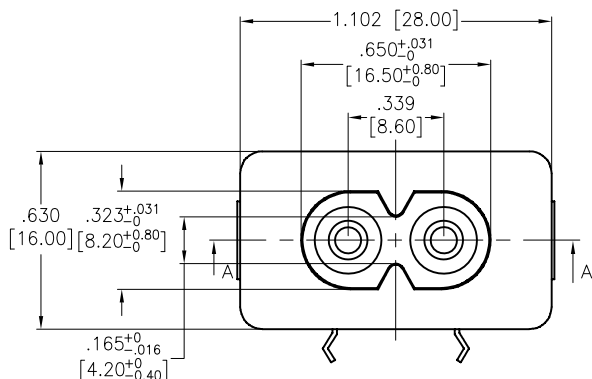
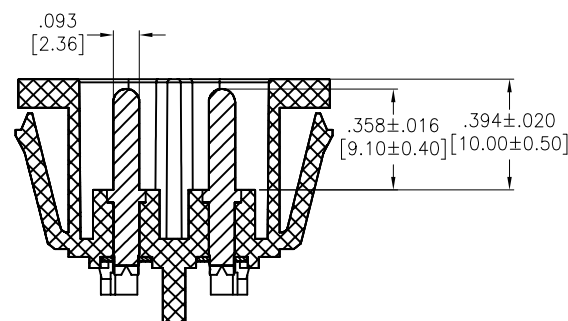


APPROVED: _____
 DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-	7150	RELEASED	11/02/06	
A		REDRAWN	7/29/14	AY/LL
B		UPDATE LOGO POSITION	8/26/19	AY/LW



RECOMMENDED PANEL CUT-OUT

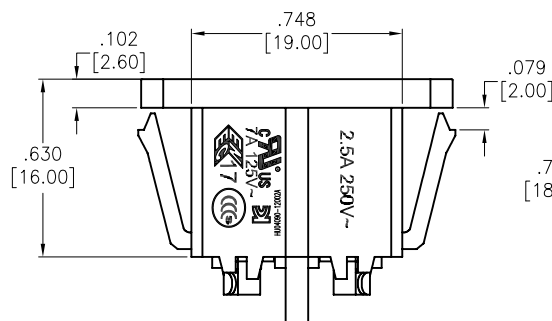

SECTION A-A



RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:
 Insulator: Nylon 66, rated UL 94V-0
 Insulator color: Black
 Terminal: Copper Alloy, Tin Plated
 Pin: Copper Alloy, Nickel Plated
 Electrical:
 Current rating: 2.5 A 250 V~(C-ULus, ENEC & CCC & KC)
 7A 125V~(C-ULus)
 Insulation resistance: 100 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 3,000 VAC for 1 minute
 Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 .XX ± .020 .XXX ± .015 Ø.X ± .10 Ø.XX ± .015 Ø.XXX ± .010				ADAM TECH INTERCONNECTS				909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710					
APPROVALS				DATE				TITLE IEC 60320, C8, RIGHT ANGLE, PC MOUNT, SNAP-IN					
DRAWN		BW		11/02/06									
CHECKED													
APPROVED													
SIZE X		PART NO. IEC-NA-4				REV B		REF: S00087C		SCALE: NTS		SHEET 1 OF 1	

TITLE
 IEC 60320, C8, RIGHT ANGLE,
 PC MOUNT, SNAP-IN