
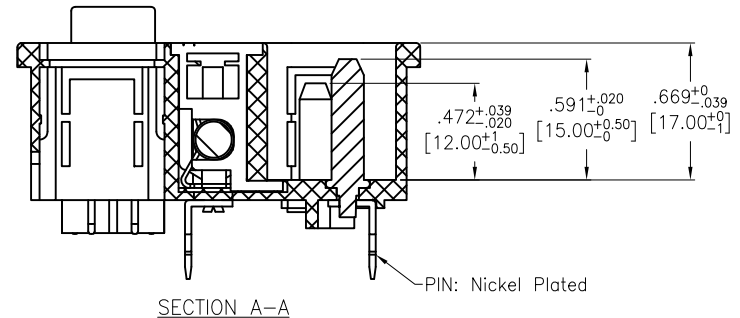
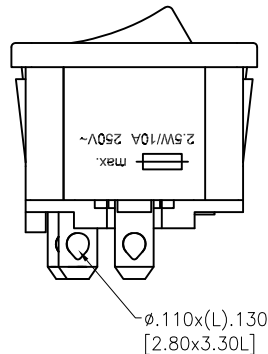
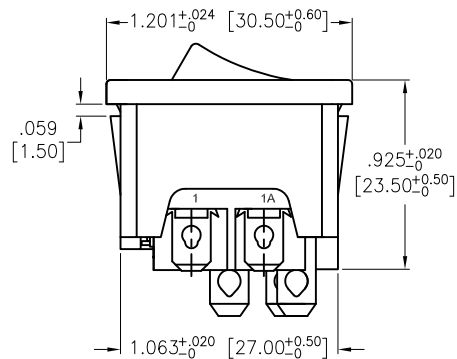
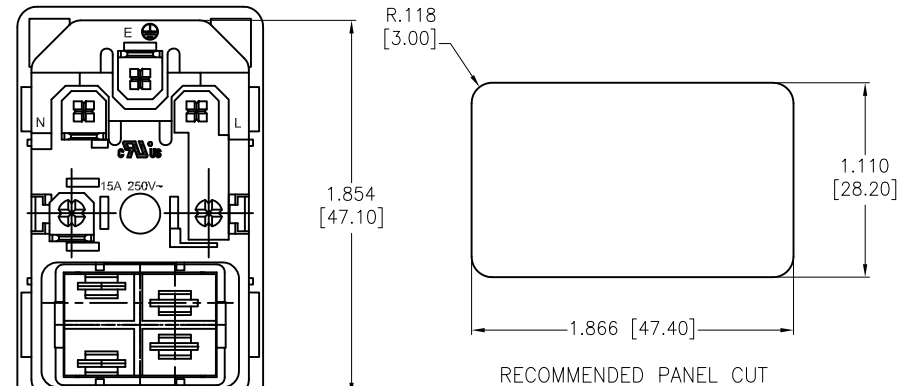
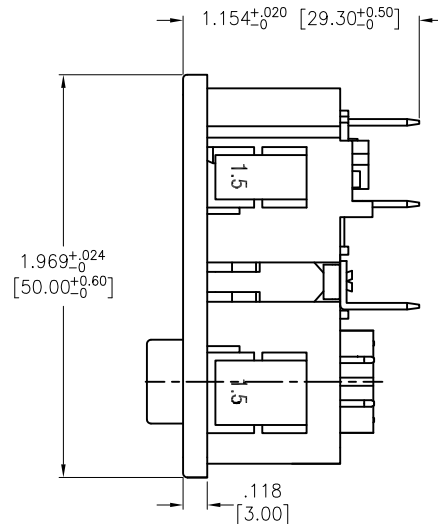


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/08/09	
A		UPDATE DRAWING	9/7/20	LH/KC
B		UPDATE DRAWING	11/4/20	SS

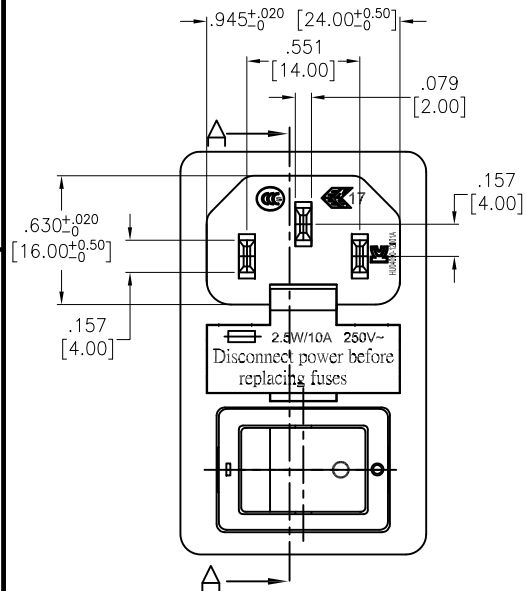

SPECIFICATIONS:

Material:

Insulator: Nylon66, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Plating:

Tin over Copper underplate

Electrical:

Rating: 15A 250V~(C-ULus)

15A 250V~(ENEC & CCC & KC)

Insulation resistance: 100 Mohms min @ 500 VDC

Dielectric withstanding voltage: 3000 VAC for 1 minute

Environmental:

Lead free, RoHS compliant.

RECOMMENDED FUSE SIZE

5X20mm

2.5W, 10A, 250V

Fuse drawer accepts 1 Fuse only



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	DY	12/08/09
CHECKED		
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE			
IEC CONNECTOR, ISOLATED FUSE			
1.50mm SNAP IN, .187" [4.8] QC TERMINAL			
SIZE	PART NO.	REV.	
X	IEC-GS-1-150	B	
REF:	S00087C	SCALE:	NTS
SHEET 1 OF 1			