

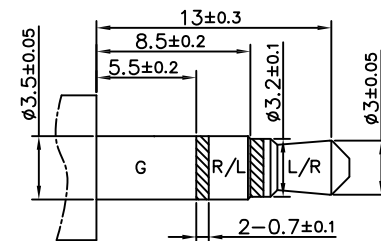
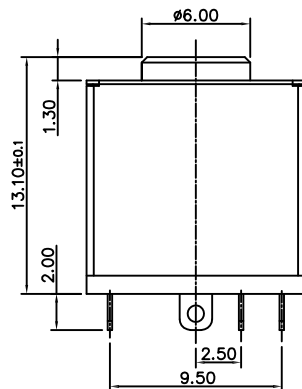
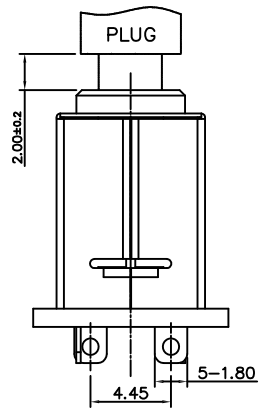


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/16/18	

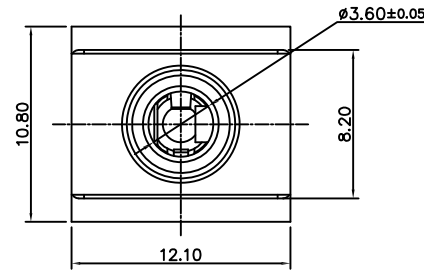

MATE PLUG



Model No.	ASJ-194-L-RD-30
Schematic	

SPECIFICATIONS:

Material:
 Housing: PA66, rated UL 94V-0, Color: Black
 Cover: PBT, rated UL 94V-0, Color: Red
 Contacts: Phosphor Bronze
 Shell: Steel Alloy
 Plating:
 30u" Gold over Nickel underplate on contact area,
 Matte Tin over Nickel underplate on solder tails
 Electrical:
 Rating: 30V, 0.5A
 Contact resistance: 30 mohms max.
 Insulation resistance: 100 Mohms min. @ 500 VDC
 Dielectric withstanding voltage: 500 VAC
 Temperature Rating:
 Operating temperature: -20°C to +70°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED		
MM	ANGLE	
.X ± 0.50	X ± 5°	
.XX ± 0.30	.X ± 3°	
.XXX ± 0.15	.XX ± 2°	
APPROVALS		DATE
DRAWN	HR	11/16/18
CHECKED	AC1	11/16/18
APPROVED		

ADAM TECH
 INTERCONNECTS
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE STEREO JACK, 3.5MM, VERTICAL, RED COVER SOLDER TERMINAL, 30u" GOLD PLATED		
SIZE X	PART NO. ASJ-194-L-RD-30	REV. -
REF: S00002C	SCALE: NTS	SHEET 1 OF 1