

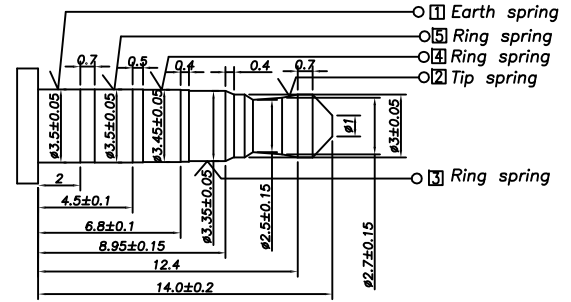
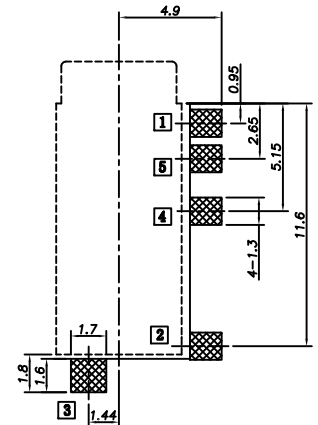

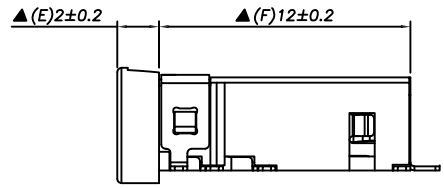



Rev	AWO #	Description	Date	Apr
-		RELEASED	11/16/18	



APPROVED: _____
 DATE: _____ TITLE: _____

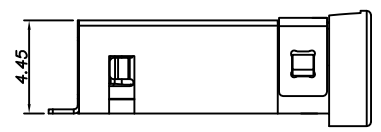

MATE PLUG

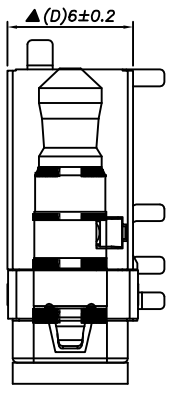

RECOMMENDED PCB LAYOUT (COPPER SIDE)

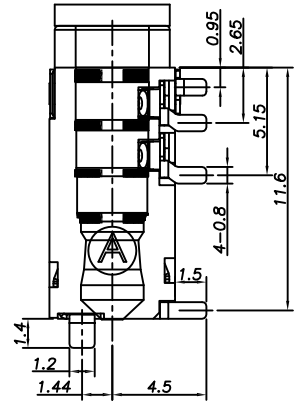

SPECIFICATIONS:
 Material:
 Housing: Hi-Temp Thermoplastic, rated UL94V-0, Color: Black
 Contacts: Phosphor Bronze
 Plating:
 Gold flash over Nickel underplate overall
 Electrical:
 Rating: 30VDC, 0.5A
 Contact Resistance: 30 mohm max.
 Insulation Resistance: 100 Mohm min. @ 500 VDC
 Dielectric withstanding voltage: 500 VAC
 Temperature Rating:
 Operating temperature: -20°C to +70°C
 Environmental:
 Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED MM ANGLE ± 0.25 ± 2°		
APPROVALS		DATE
DRAWN	HR	11/16/18
CHECKED	AC1	11/16/18
APPROVED		

ADAM TECH INTERCONNECTS
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE		
3.5MM STEREO PHONE JACK, RIGHT ANGLE, SMT		
SIZE	PART NO.	REV.
X	ASJ-196-K-T/R	-
REF:	S00002C	SCALE: NTS SHEET 1 OF 1

