

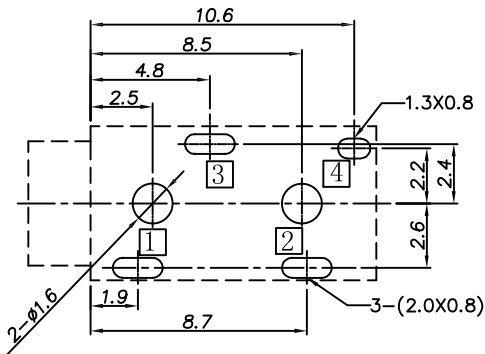
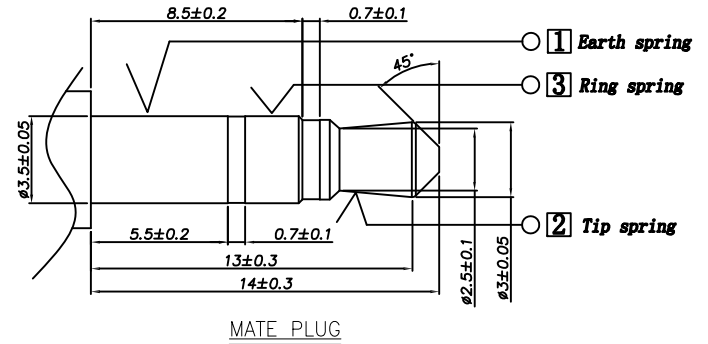
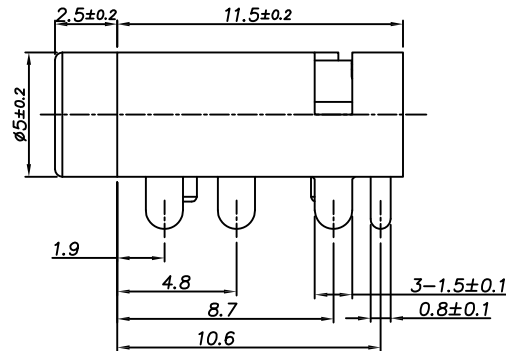


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/16/18	



RECOMMENDED PCB LAYOUT

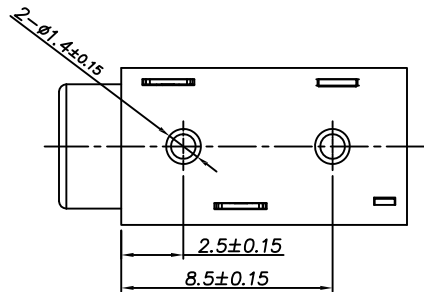

Model No.	ASJ-200-B-HT	ASJ-200-C-HT	ASJ-200-D-HT
Schematic			

SPECIFICATIONS:

Material:
 Housing: Hi-Temp Thermoplastic, reated UL94V-0, Color: Black
 Contacts: Copper Alloy
 Plating:
 Silver over Copper underplate overall
 Electrical:
 Rating: 30VDC, 0.5A
 Contact Resistance: 30 mohm max.
 Insulation Resistane: 100 Mohm min. @ 500 VDC
 Dielectric withstanding voltage: 500 VAC
 Temperature Rating:
 Operating temperature: -20°C to +70°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED MM ANGLE .X ± 0.50 X ± 5° .XX ± 0.30 .X ± 3° .XXX ± 0.15 .XX ± 2°		ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		DATE		TITLE	
DRAWN	HR	11/16/18		3.5MM STEREO PHONE JACK, RIGHT ANGLE	
CHECKED	AC1	11/16/18		SIZE	PART NO.
APPROVED				X	ASJ-200-X-HT
REF: S00002C		SCALE: NTS	SHEET 1 OF 1		

6 5 4 3 2 1

D

D

C

C

B

B

A

A

6 5 4 3 2 1