

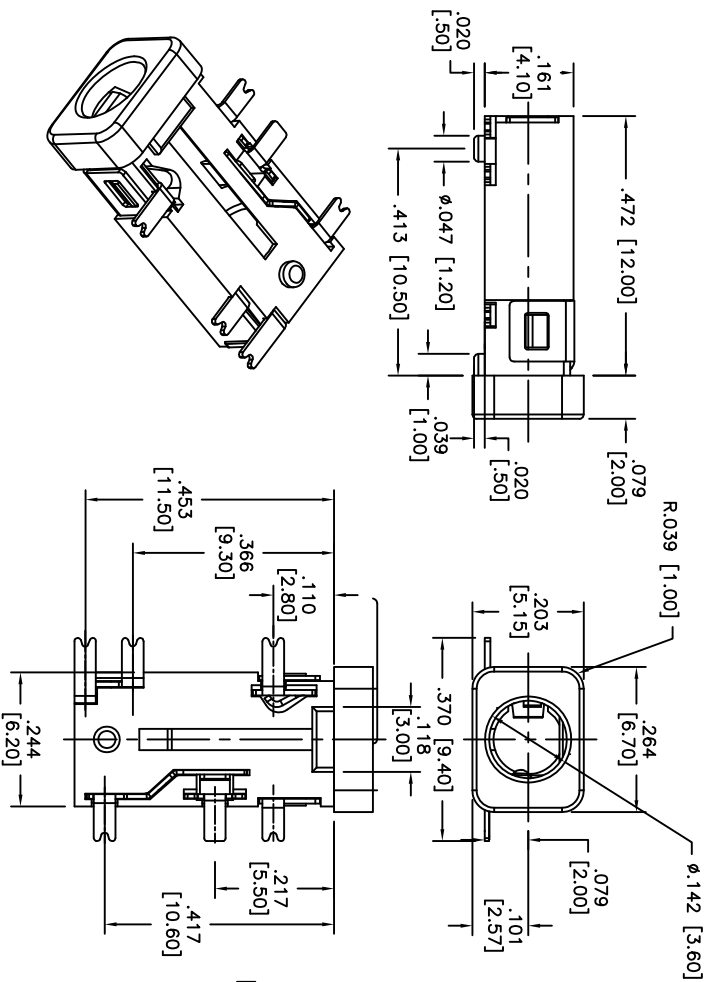


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/13/10	

APPROVED: _____ TITLE: _____
 DATE: _____

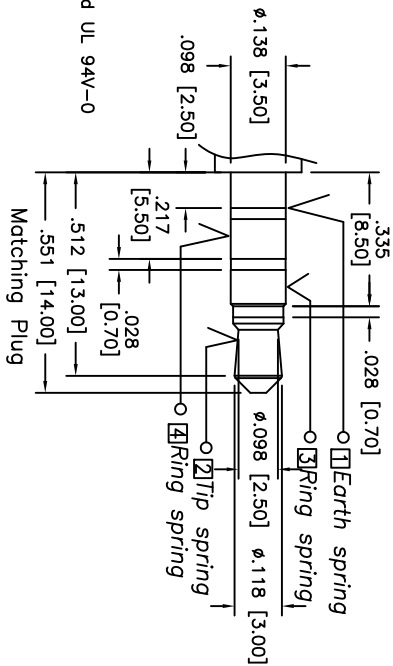

RECOMMENDED PCB LAYOUT
 (Copper-sided view)

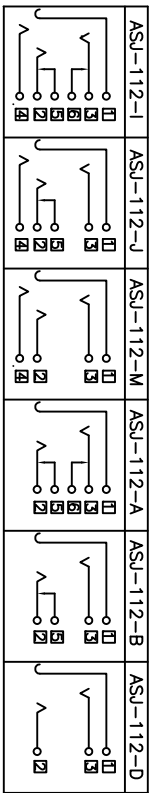

SPECIFICATIONS:
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Plating: Gold flash over Nickel underplate
 Electrical: Operating voltage: 30 VDC max.
 Current rating: 1 Amp max.
 Contact resistance: 30 mohms max.
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: Operating temperature: -25°C to +85°C
 Environmental: Lead free, RoHS compliant.

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: STEREO PHONE JACK, 3.5mm

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TOLERANCES: EXCEPT AS NOTED INCHES		HOLES	
.X	± .10	ØX	± .10		
.XX	± .020	ØXXX	± .015		
.XXX	± .015	ØXXXX	± .010		
APPROVALS		DATE		TITLE	
DRAWN	AY	8/13/10		STEREO PHONE JACK, 3.5mm	
CHECKED	DY	8/13/10		PART NO. ASU-112-X	
APPROVED				SIZE X	
		REF: S0002C		SCALE: NTS	
				SHEET 1 OF 1	