
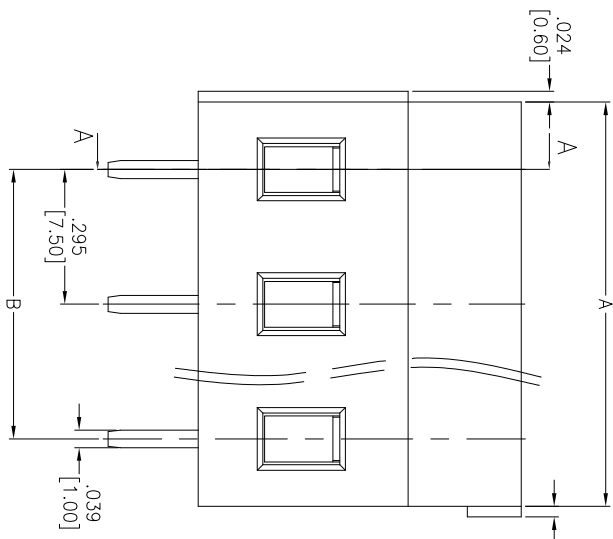
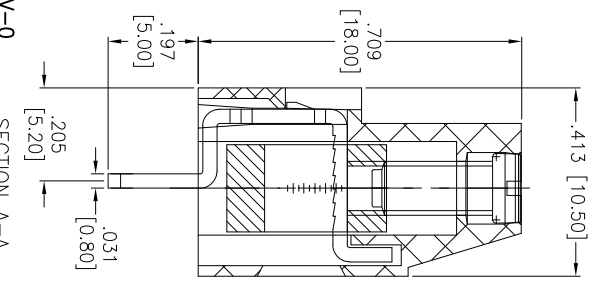
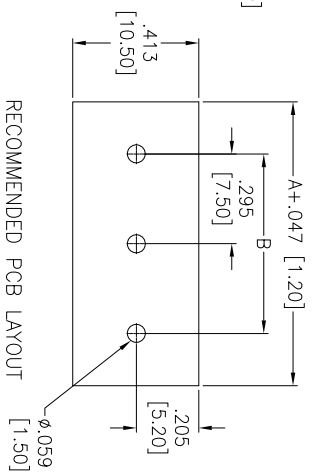


| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|---------|------|
| - | | RELEASED | 8/25/14 | |

APPROVED: _____
 DATE: _____ TITLE: _____

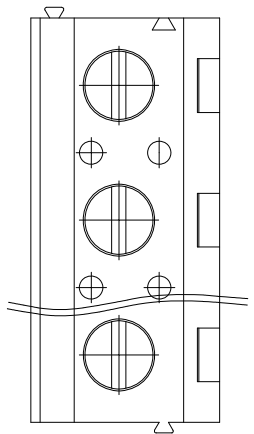

Positions: 02 thru 24
 A = .295 [7.50] x No. of Positions
 B = .295 [7.50] x No. of Spaces

SPECIFICATIONS:
 Material: PAB66, rated UL 94V-0
 Insulator color: Green
 Screw: Steel, M3.0/Zinc plated
 Cage: Brass, Nickel plated
 Pin Header: Brass, Tin plated
 Electrical:
 Voltage rated: 300 VAC
 Current rated: 16 Amps
 Contact resistance: 20 mΩ
 Insulation resistance: 500 MΩ @ 500 VDC
 Withstanding voltage: 2000V AC/1 Min
 Mechanical:
 Solid wire: 26-12AWG 2.5mm²
 Torque (Lb-in): 0.5Nm (4.5lb-in)
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.



| UNLESS OTHERWISE SPECIFIED | |
|--------------------------------|-------------|
| ALL DIMENSIONS ARE INCHES [MM] | |
| TOLERANCES: EXCEPT AS NOTED | HOLE SIZES |
| .X ± .10 | ØX ± .10 |
| .XX ± .020 | ØXX ± .015 |
| .XXX ± .015 | ØXXX ± .010 |

| APPROVALS | | DATE |
|-----------|----|---------|
| DRAWN | AY | 8/25/14 |
| CHECKED | SC | 8/25/14 |
| APPROVED | | |

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, .295 [7.50] PITCH

| SIZE | PART NO. | REV. |
|------|-------------|------|
| X | EB147A-XX-M | - |

REF: S00067C SCALE: NTS SHEET 1 OF 1