
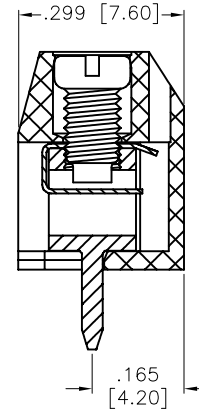
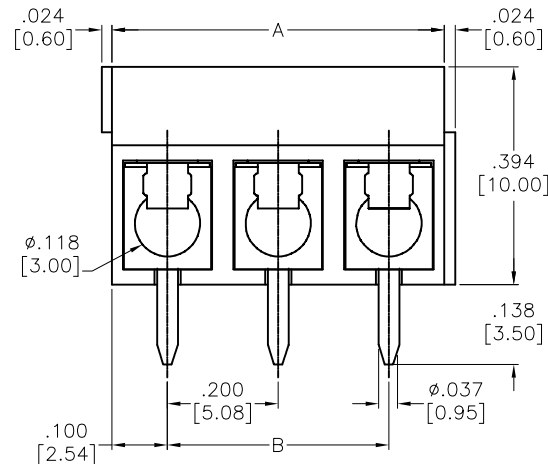
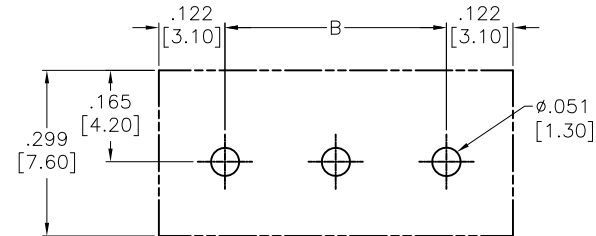


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/26/13	
A		UPDATE DRAWING	11/20/20	OW/RC

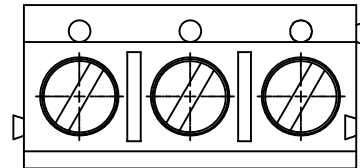

SPECIFICATIONS:

Material:

Insulator: Thermoplastic, rated UL 94V-0

Insulator color: Blue

Wire guard: Stainless Steel

Contact: Brass, Tin plated

Screw: Steel, M2.6, Zinc plated

Electrical:

Voltage rating: 300 VAC

Current rating: 16 A

Withstanding Voltage: 1.6KV

Mechanical:

Solid wire(AWG): 14-22

Stranded wire(AWG): 14-22

Torque(Lb-In): 2.6

Wire strip length(mm): 5-6

Temperature Rating:

Operating temperature: -40°C to +115°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 24

A = .200 [5.08] x No. of Positions

B = .200 [5.08] x No. of Spaces

	Dim A	Dim B
2-6P	±.006 [0.15]	±.004 [0.10]
7-12P	±.008 [0.20]	±.008 [0.20]
13-18P	±.012 [0.30]	±.010 [0.25]
19-24P	±.016 [0.40]	±.012 [0.30]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

EURO BLOCK, .200 [5.08] PITCH

APPROVALS		DATE
DRAWN	AY	11/26/13
CHECKED	SL	11/26/13
APPROVED		

SIZE	PART NO.	REV.
X	EBB-XX-D-BL	A
REF:	S00007T	SCALE: NTS
SHEET 1 OF 1		