
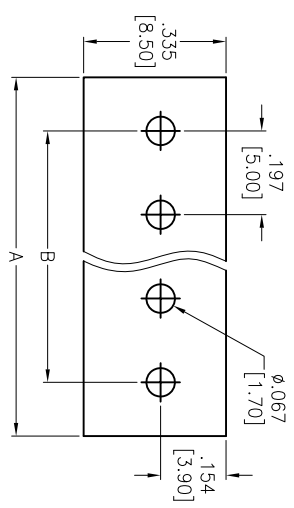
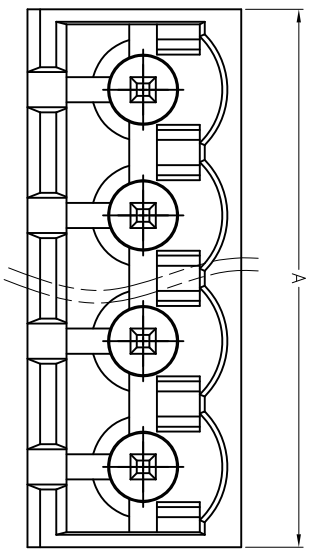
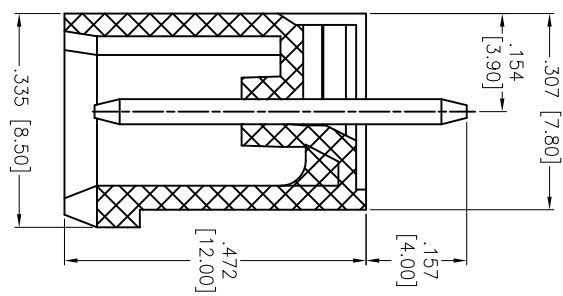


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/24/14	

APPROVED: _____
 DATE: _____ TITLE: _____

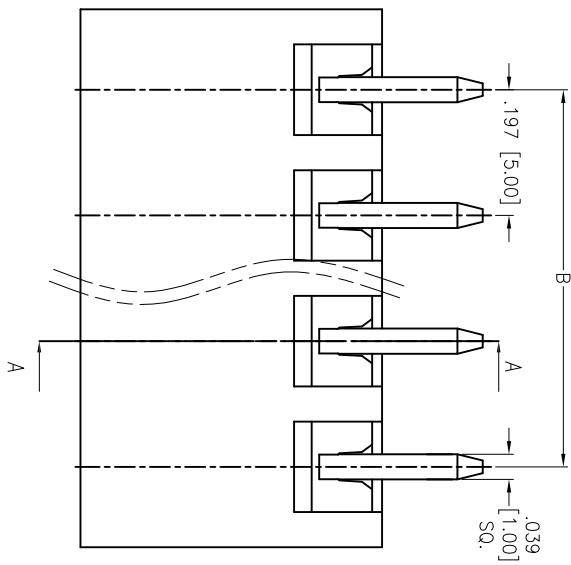

RECOMMENDED PCB LAYOUT

Positions: 02 thru 24
 A = .197 [5.00] x No. of Positions + .055 [1.40]
 B = .197 [5.00] x No. of Spaces

SPECIFICATIONS:
 Material: Insulator: PA66, rated UL 94V-0
 Insulator color: Green
 Contact: Brass, Tin plated.
 Electrical:
 Operation voltage: 300 VAC max
 Current rating: 15 Amps
 Contact resistance: 20 mohms max
 Insulation resistance: 500 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 2,000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED
 INCHES HOLE SIZES
 .X ± .10 ØX ± .10
 .XX ± .020 ØXX ± .015
 .XXX ± .015 ØXXX ± .010



APPROVALS	DATE
DRAWN	HR
CHECKED	NP
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	TERMINAL BLOCK SOCKETS .197 [5.00] PITCH VERTICAL, CLOSE TYPE
SIZE	PART NO.
X	EBPA-XX-C-C
REF: S0067C	SCALE: NTS
SHEET 1 OF 1	REV.