
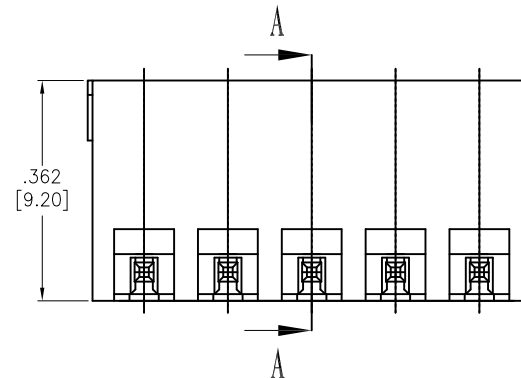
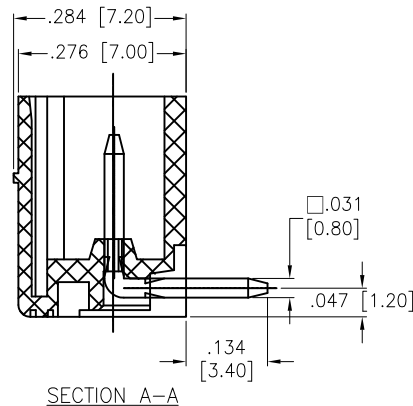
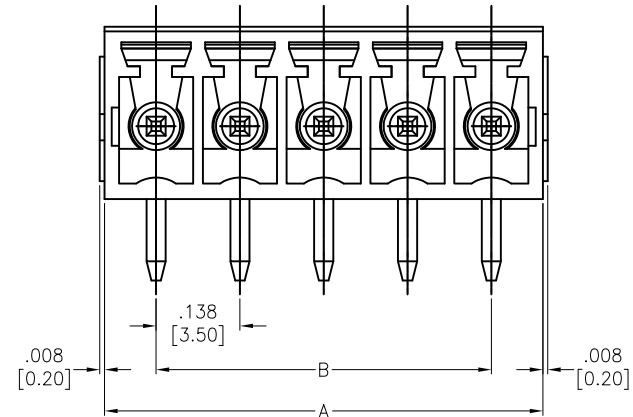


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/23/14	
A		REVISED LAYOUT DIM.	11/25/14	AY/MY
B		UPDATED DRAWING	5/11/18	HR/NP

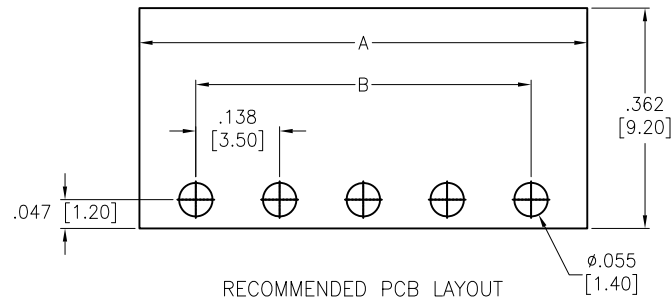

SPECIFICATIONS:

Material:
 Insulator: PA66, rated UL 94V-0
 Insulator color: Green
 Contact: Brass, Tin plated
 Electrical:
 Voltage rating: 300 V
 Current rating: 8 A
 Contact resistance: 20 mohms
 Insulation resistance: 500 Mohms @ 500 VDC
 Dielectric withstanding voltage: 2,000 VAC for 1 minute
 Temperature Rating:
 -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.



Positions: 02 thru 24
 A= .138 [3.50] x No. of Spaces + .169 [4.30]
 B= .138 [3.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 .XX ± .020 .XXX ± .015 Ø.X ± .10 Ø.XX ± .015 Ø.XXX ± .010			ADAM TECH INTERCONNECTS 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		
APPROVALS DRAWN AC CHECKED SC APPROVED			DATE 6/23/14 6/23/14		
			TITLE TERMINAL BLOCK, RIGHT ANGLE, .138" [3.50] PITCH		
			SIZE X		PART NO. EBSA-XX-A
			REF: S00067C		SCALE: NTS
			SHEET 1 OF 1		