
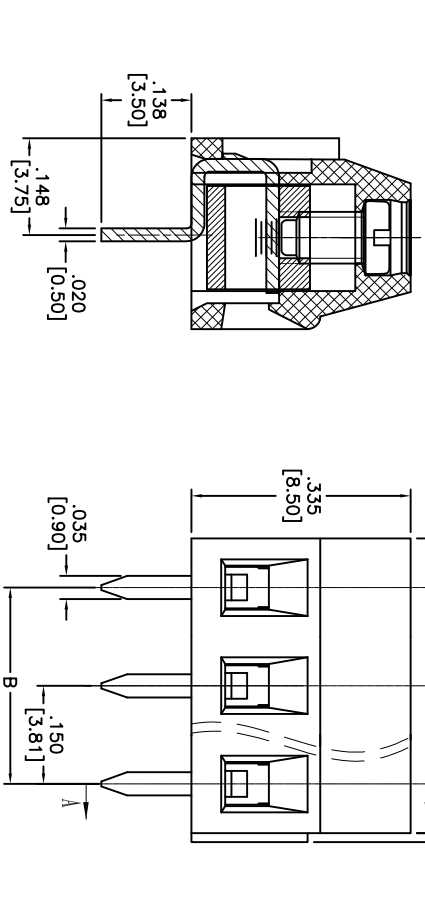


APPROVED: \_\_\_\_\_ TITLE: \_\_\_\_\_

DATE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/13/15	

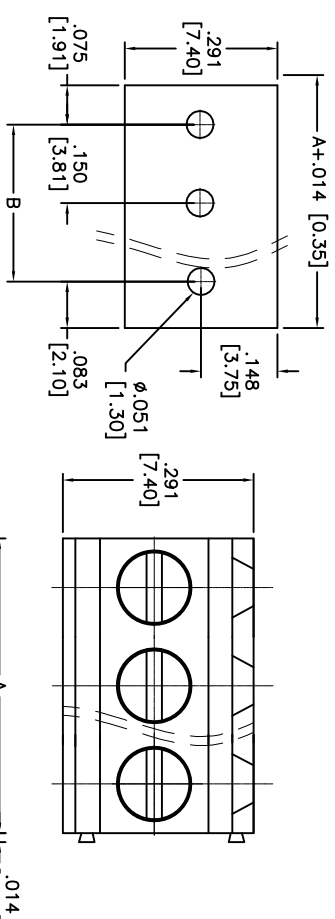

Positions: 2 thru 24  
 A = .150 [3.81] x No. of Positions  
 B = .150 [3.81] x No. of Spaces

**SPECIFICATIONS:**

**Material:**  
 Insulator: PA66, rated UL 94V-0  
 Insulator color: Green  
 Contact: Brass, Tin plated  
 Screw: Steel, M2/Zinc plated

**Electrical:**  
 Voltage rated: 300 VAC max  
 Current rated: 10 Amps max  
 Contact resistance: 20 mΩ  
 Insulation resistance: 500 MΩ/ 500VDC  
 Withstanding voltage: 2000 VAC for 1 minute

**Mechanical:**  
 Torque: 0.2Nm (1.8 lb.in)  
 Wire Range: 28-16Awg 1.0mm<sup>2</sup>  
 Strip Length: 4-5mm

**Environmental:**  
 Operating temperature: -40°C to +105°C  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MM [INCHES]  
 TOLERANCES: EXCEPT AS NOTED  
 HOLES  
 X ± .10 ØX ± .10  
 .XX ± .020 ØXX ± .015  
 .XXX ± .015 ØXXX ± .010

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE  
**TERMINAL BLOCK, PCB, VERTICAL,  
 .150 [3.81] PITCH**

APPROVALS	DATE
DRAWN AY	1/13/15
CHECKED GC	1/13/15
APPROVED	

SIZE	PART NO.	SCALE	SHEET
X	EBWA-XX-B	NIS	1 OF 1

A

B

C

D

6

5

4

3

2

1