
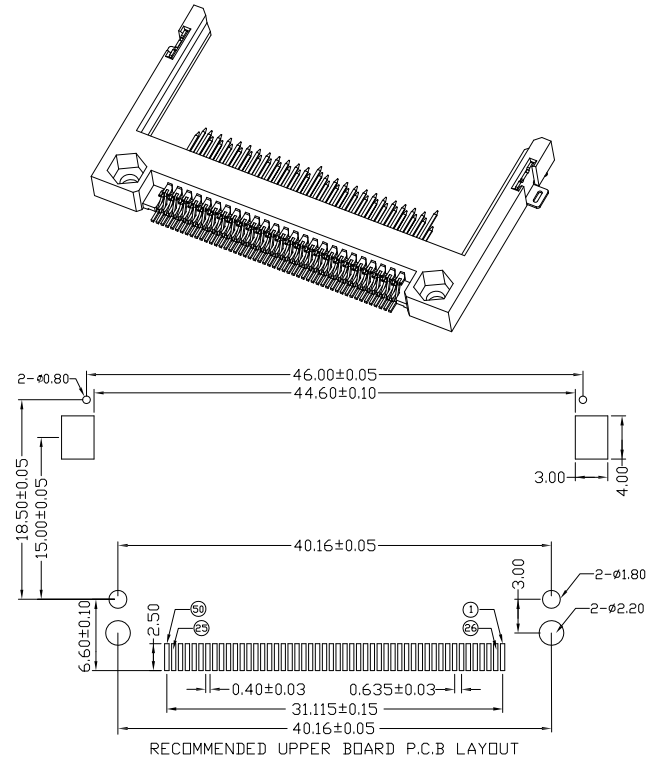
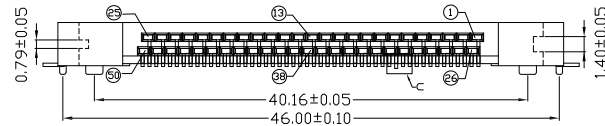
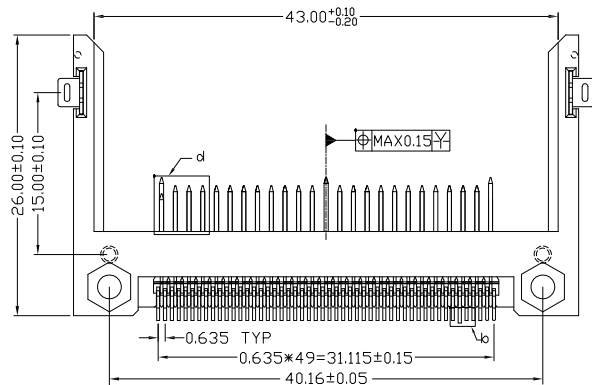






APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/8/06	
A		UPDATE DRAWING	6/30/17	AY/IC
B		UPDATE DRAWING	8/4/17	AY/IC



RECOMMENDED UPPER BOARD P.C.B LAYOUT



SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Ivory

Contacts: Brass

Holddown: Brass, Tin plated

Plating:

Gold over Nickel underplate on contact area

Electrical:

Voltage rating: 100 VAC

Current rating: 0.5 Amp

Contact resistance: 40 mΩ

Insulation resistance: 1000 MΩ

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ±.10 Ø.X ±.10
.XX ±.020 Ø.XX ±.015
.XXX ±.015 Ø.XXX ±.010

APPROVALS		DATE
DRAWN	SS	2/8/06
CHECKED		
APPROVED		

POWER	5.00mm	1,13,38,50
GENERAL	4.25mm	all other pins
DETECT	3.50mm	25,26
Pin type	Interface Dim. L	Pin No.

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
CF SOCKET, SLIM TYPE, TOP
MOUNT

SIZE X	PART NO. CFA-50-A-SG-1	REV. B
REF: S00009T	SCALE: NTS	SHEET 1 OF 1