
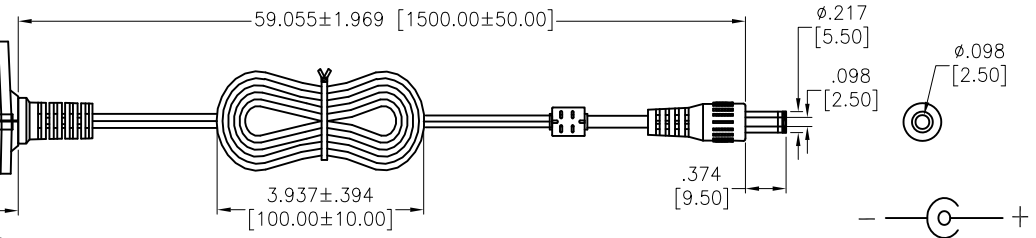
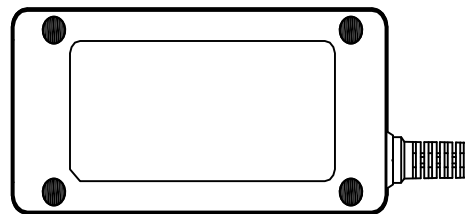
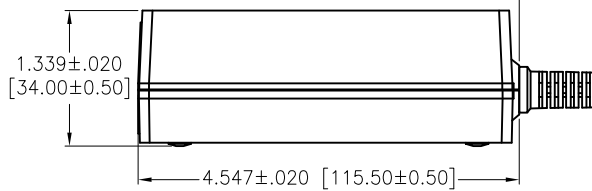


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/21	
A		ADDED TOLERANCE	6/10/21	WX/AC
B		UPDATE LABEL	7/19/21	WX/AC
C		UPDATE LABEL	1/12/24	WX/SL

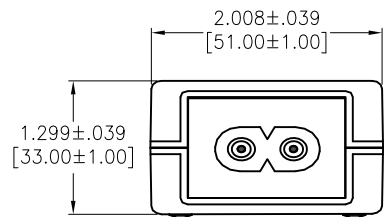

SPECIFICATIONS:

Connector

P1: Power Adapter, IEC Female C5

P2: DC Plug, W/Strain Relief, 5.5*2.5*9.5mm

Overmold Color: Black PVC-45P

CABLE:

UL2468: 22AWG*2C 80°C, Jacket Color: Black

Electrical:

Input:

Voltage: 100Vac to 240Vac

Current: 1.5A Max. @ 100Vac input & max load

Frequency: 50Hz / 60Hz

Output:

Voltage: 48V

Current: 1.35A max.

Load Regulation: ±5%

Line Regulation: ±3%

Line Load Regulation-Output Rate: 48V, 1.35A

Insulation Resistance: 100 Mohms min @ 500VDC

Dielectric withstanding voltage (Hi-pot): 3,000V AC For 1 Minute

Leakage Current: 0.25mA max. @ 240V AC/50Hz


Temperature Rating:

Operating Temperature: 0°C to +45°C

Storage Temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.

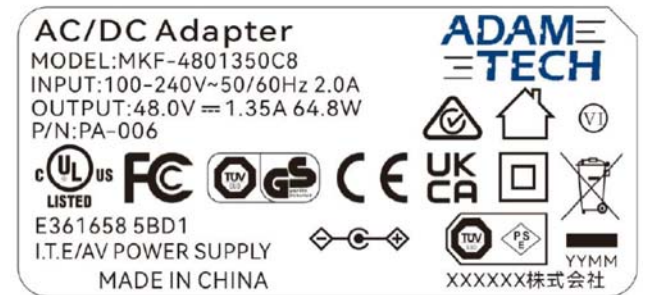

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED		
INCHES		HOLES
X ±.10		ØX ±.10
.XX ±.020		Ø.XX ±.015
.XXX ±.015		Ø.XXX ±.010

DRAWN	WX	3/19/21
CHECKED	AC	3/19/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE: POWER ADAPTER, IEC C7 TO 2.5 X 5.5 X 9.5
 DC PLUG, 48 VOLT, 1.35 AMP, UL2468 22AWG

SIZE	PART NO.	REV.
X	PA-006	C

REF: SCALE: NTS SHEET 1 OF 1