
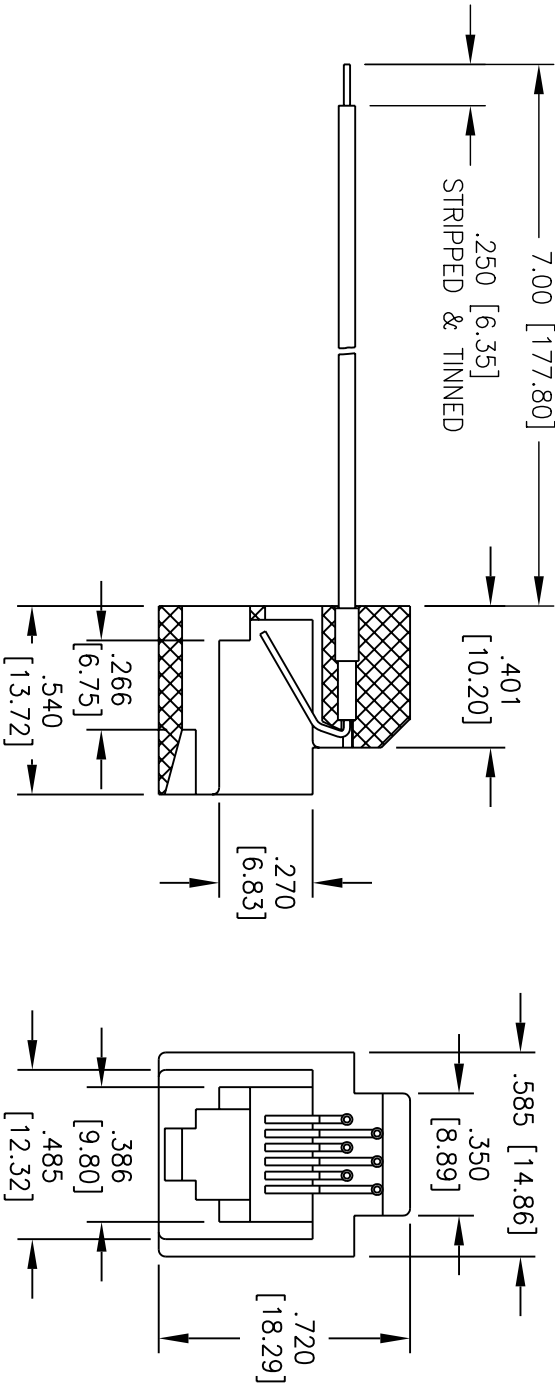


Rev	AWO #	Description	Date	Appr
-		RELEASED	04/04/05	

APPROVED: _____
DATE: _____ TITLE: _____



X	PLATING
0	15 µin Gold
1	30 µin Gold
2	50 µin Gold

SPECIFICATIONS:

Material:
Insulator: ABS, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold over Nickel underplate on contact area.
(See chart for thickness)

Electrical:
Operating voltage: 150 VAC max
Current rating: 1.5 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -40C to +125C
Environmental:
Lead free, RoHS compliant.



ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE LEADED JACK, STYLE 623-K4,
6 POSITION / 4 CONTACT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				Holes			
INCHES				Holes			
.X	± .10	Ø.X	± .10	.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015	.XX	± .015	Ø.XX	± .010
.XXX	± .015	Ø.XXX	± .010	.XXX	± .015	Ø.XXX	± .010
APPROVALS				DATE			
DRAWN	SS	04/04/05		CHECKED			
APPROVED							

SIZE	PART NO.	REV.
X	MTJP-623-K4-X-A1-1	-

REF: SCALE: NTS SHEET 1 OF 1