

6

5

4

3




2

1

APPROVED: \_\_\_\_\_



DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	01/17/07	
A		REVISED COLOR	6/21/10	
B		REDRAWN	05/25/12	

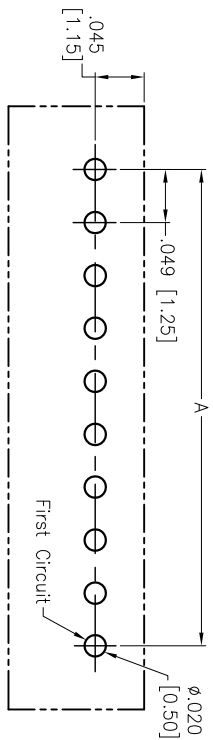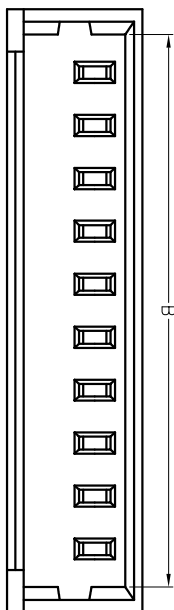
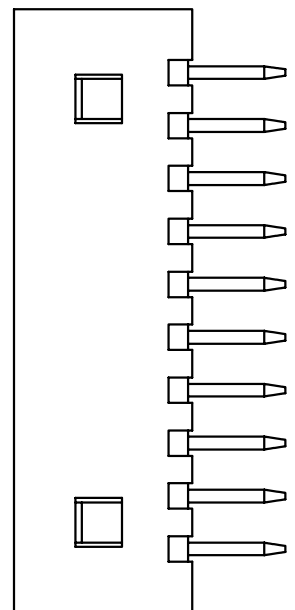


RECOMMENDED PCB LAYOUT

3 Circuit

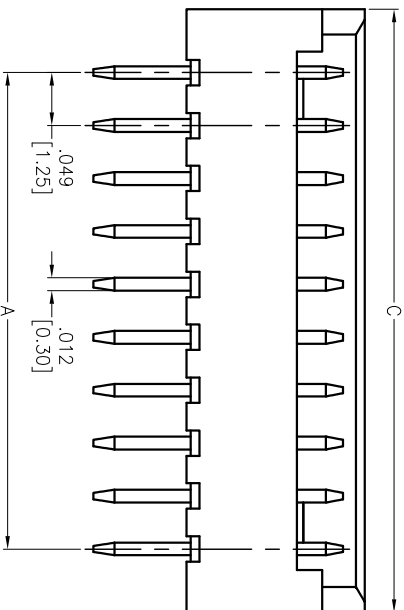

2 Circuit

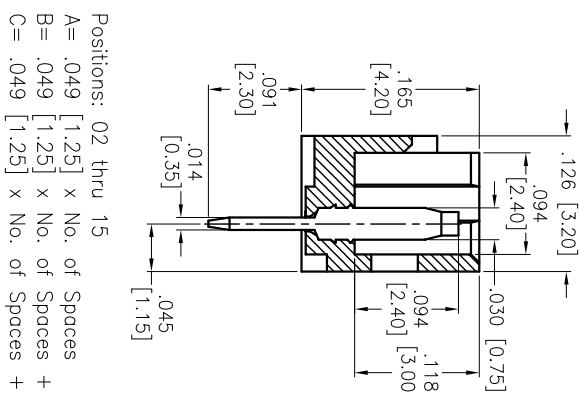

Positions: 02 thru 15

A = .049 [1.25] x No. of Spaces

B = .049 [1.25] x No. of Spaces + .070 [1.80]

C = .049 [1.25] x No. of Spaces + .118 [3.00]

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MX 1.25mm WAFER DIP 180°

**SPECIFICATIONS:**

**Material:**  
Insulator: Nylon 66, rated UL 94V-0  
Insulator color: Natural

**Contacts:** Brass  
**Plating:**  
Tin over Nickel underplate overall

**Electrical:**  
Operating voltage: 125 VAC max  
Current rating: 1 Amps max  
Contact resistance: 20 mohms max  
Insulation resistance: 100 Mohms min

**Temperature Rating:**  
Operating temperature: -40°C to +85°C  
Environmental:  
Lead free, RoHS compliant.

**Environmental:**  
Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDERS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	BW
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	125SH-B-XX-TS	B
REF:	S00124T	SCALE: NTS
SHEET 1 OF 1		

6

5

4

3

2

1