

6

5

4

3






2

1

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/18/11	

APPROVED: _____

DATE: _____ TITLE: _____

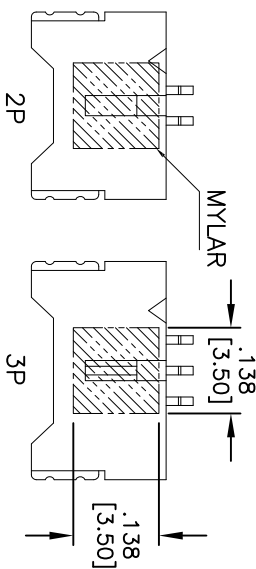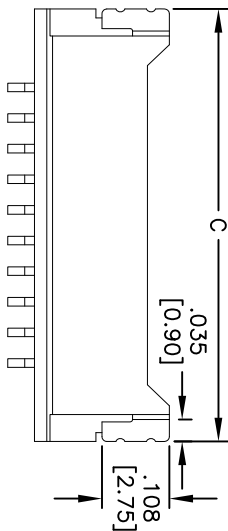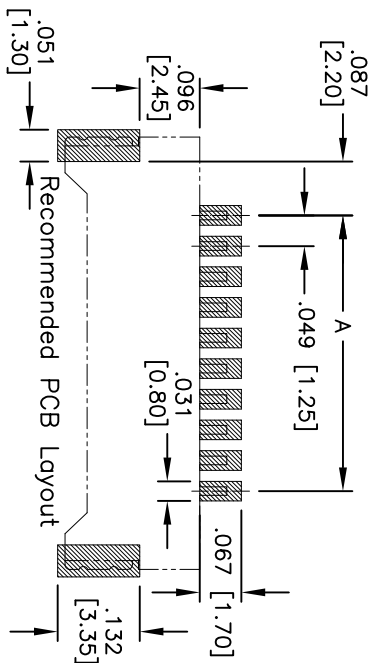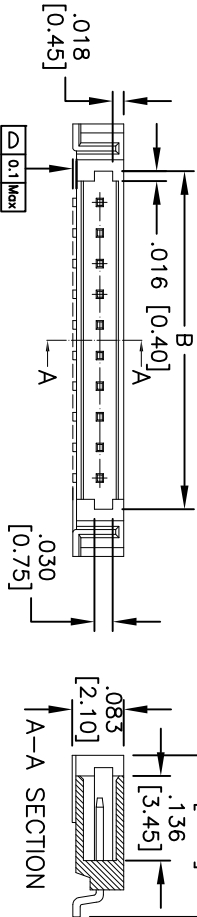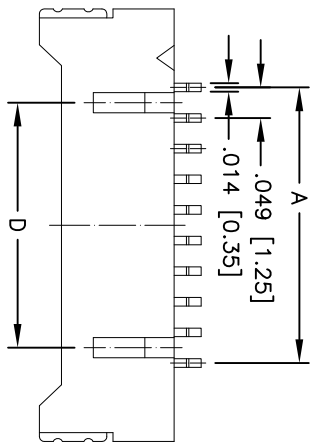

PACKAGED ON TAPE & REEL

Positions: 02 thru 30

- A = .049 [1.25] x No. of Spaces
B = .049 [1.25] x No. of Spaces + .100 [2.55]
C = .049 [1.25] x No. of Spaces + .252 [6.40]
D = (4~19 Positions) = .049 [1.25] x No. of Spaces - .049 [1.25]
(20~30 Positions) = .886 [22.50]

SPECIFICATIONS:

- Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Natural
Contacts: Copper alloy
Solder Nail: Brass, Tin plated
Plating: Gold flash over Nickel underplate overall
Electrical: Current rating: 1.0A AC,DC
Contact resistance: 20 mohms max. initial
Insulation resistance: 100 Mohms min.
Dielectric withstanding voltage: 250 VAC for 1 minute
Temperature Rating: Operating temperature: -25°C to +85°C
Environmental: Lead free, RoHS compliant
Recommended soldering temp: 260°C for 5 seconds



ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

.049 [1.25] WAFER, SMT, RIGHT ANGLE

GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				Holes			
.X	± .10	Ø.X	± .10	.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015	.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010	.XXX	± .015	Ø.XXX	± .010
APPROVALS				DATE			
DRAWN	AY		11/18/11	SIZE	PART NO.	REV.	
CHECKED	OC		11/18/11	X	125SH-H-XX-GR-SMT-T/R		
APPROVED				REF:	S00724T	SCALE: NTS	SHEET 1 OF 1