
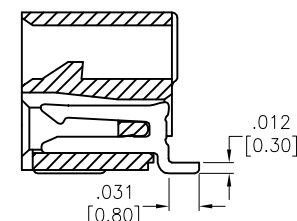
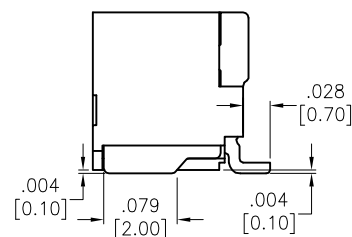
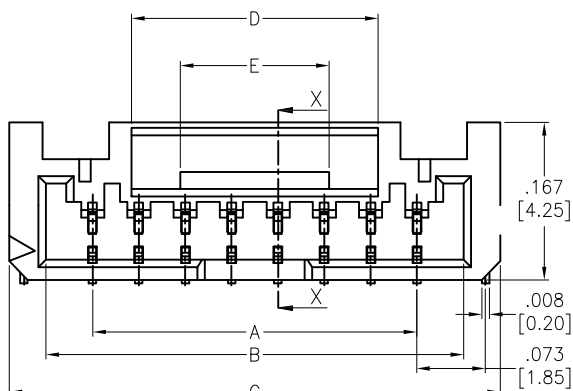
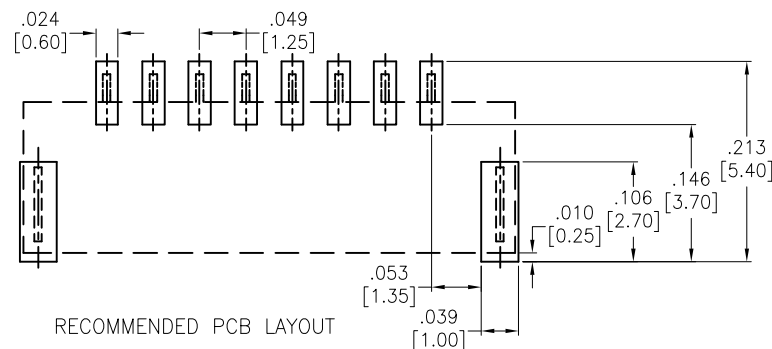


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/31/16	
A		UPDATE DRAWING	1/29/21	OW/EY

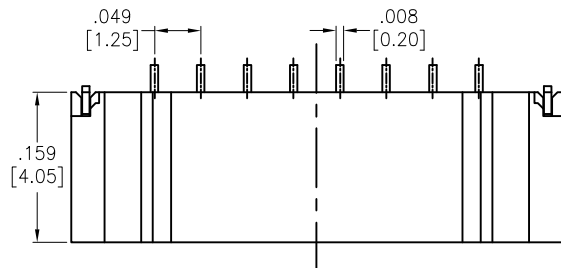

SECTION X-X

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Natural

Contacts: Copper Alloy

Nail: Copper Alloy, Tin plated

Plating:

Tin over Nickel underplate overall

Electrical:

Operating voltage: 50V AC/DC

Current rating: 1A AC/DC

Contact resistance: 30 mohms max

Insulation resistance: 100 Mohms min

Dielectric withstanding voltage: 500V AC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

Positions: 02 thru 15

A= .049 [1.25] x No. of Spaces

B= .049 [1.25] x No. of Spaces + .098 [2.50]

C= .049 [1.25] x No. of Spaces + .177 [4.50]

D= 2P: .083 [2.10], 3P: .134 [3.40], 4~5P: .183 [4.65]

6~9P: .262 [6.65], 10~15P: .339 [8.60]

E= 2P: .030 [0.75], 3P: .051 [1.30], 4~5P: .083 [2.10]

6~9P: .157 [4.00], 10~15P: .236 [6.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	5/31/16
CHECKED	NP	5/31/16
APPROVED		

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.049 [1.25] PITCH WIRE TO BOARD HEADER
RIGHT ANGLE TYPE

SIZE	PART NO.	REV.
X	125SH-K-XX-TR-SMT-T/R	A
REF:	S00124T	SCALE: NTS
SHEET 1 OF 1		