

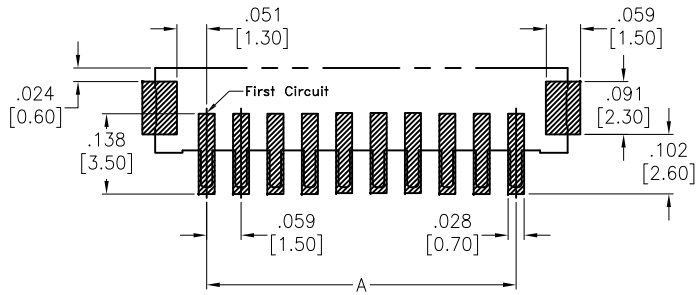


APPROVED: _____
 DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/7/13	
A		UPDATED DRAWING	11/20/17	HR/IC

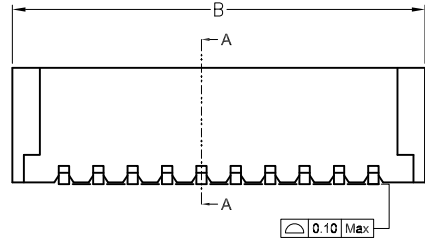



RECOMMENDED PCB LAYOUT

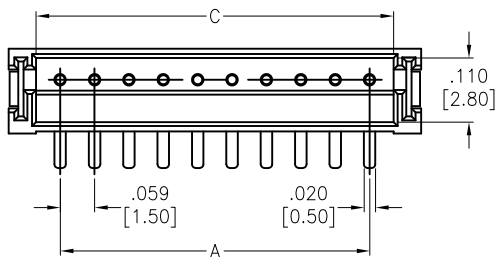

0.10 Max



SECTION A-A

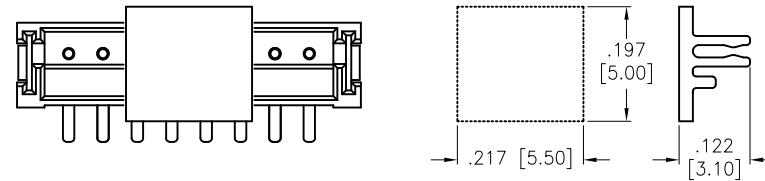

ASSEMBLY VIEW

PACKAGED ON TAPE & REEL

Positions: 02 thru 15

A = .059 [1.50] X No. of Spaces

B = .059 [1.50] X No. of Positions + .118 [3.00]

C = .059 [1.50] X No. of Positions + .024 [0.60]

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Natural

Contacts: Brass

Plating:

Tin over Nickel underplate overall

Electrical:

Voltage rating: 50 AC/DC

Current rating: 1 AC/DC

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	∅X	± .10
.XX	± .020	∅XX	± .015
.XXX	± .015	∅XXX	± .010

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	AY	3/7/13
CHECKED	CC	3/7/13
APPROVED		

TITLE			
.059 [1.50] TOP ENTRY TYPE, SMT TYPE			
SIZE	PART NO.	REV.	
X	15SH-A-XX-TS-SMT-PP-T/R	A	
REF:	S00124T	SCALE:	NTS
		SHEET 1 OF 1	