

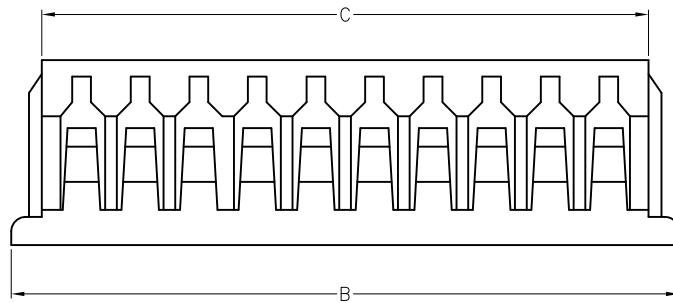

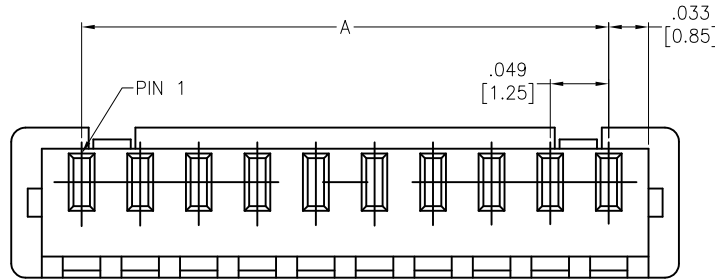



APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/07	
A		REVISED COLOR	6/21/10	
B		UPDATE DRAWING	10/25/17	AY/NC

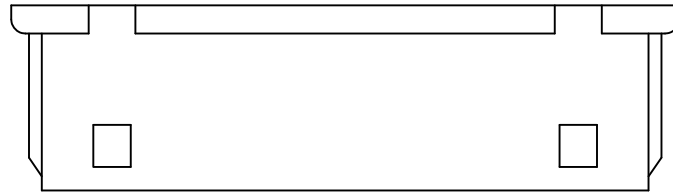

Positions: 02 thru 15  
 A= .049 [1.25] x No. of Spaces  
 B= .049 [1.25] x No. of Spaces + .118 [3.00]  
 C= .049 [1.25] x No. of Spaces + .067 [1.70]

**SPECIFICATIONS:**  
 Material:  
 Insulator: Nylon 66, rated UL 94V-0  
 Insulator color: Natural  
 Electrical:  
 Voltage rating: 125 VAC/DC  
 Current rating: 1 A AC/DC  
 Contact resistance: 20 mohms max.  
 Insulation resistance: 100 Mohms min  
 Dielectric withstanding voltage: 250 VAC for 1 minute  
 Temperature Rating:  
 -40°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	BW	01/17/07
CHECKED		
APPROVED		

TITLE 1.25mm HOUSING		
SIZE X	PART NO. 125CH-B-XX	REV. C
REF: S00124T	SCALE: NTS	SHEET 1 OF 1