

6

5

4

3




2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/11/08	
A		REVISED SHAPE	11/18/10	
B		REVISED COLOR	5/27/11	

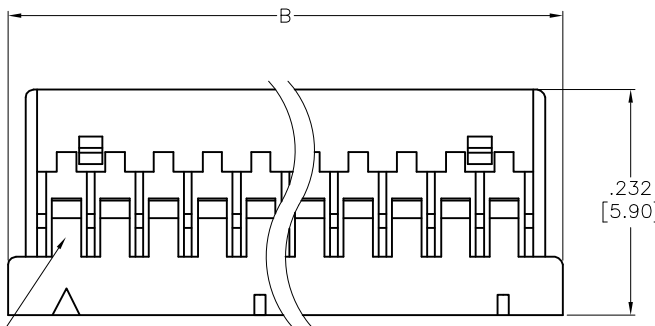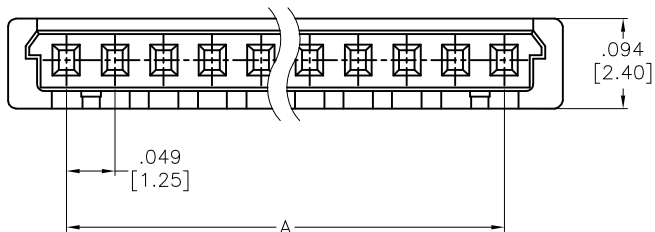

CIRCUIT1

**SPECIFICATIONS:**

Material:  
Insulator: Nylon 66, rated UL 94V-0  
Insulator color: Beige

**Electrical:**  
Voltage rating: 100V AC/DC  
Current rating: 1A AC/DC max  
Insulation resistance: 500 Mohms min  
Dielectric withstanding voltage: 500 VAC for 1 minute

**Temperature Rating:**  
Operating temperature: -25°C to +85°C

Environmental:  
Lead free, RoHS compliant.



Positions: 2 thru 10, 12, 15, 20, 25, 30  
A = .049 [1.25] X No. of positions - 1  
B = .049 [1.25] X No. of positions + .077 [1.95]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	
DRAWN	DATE
SS	11/11/08
CHECKED	
APPROVED	

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
Phone: 908-687-5000 Fax: 908-687-5710

TITLE  
1.25mm CRIMP HOUSING SINGLE ROW  
2 THRU 30 POSITIONS, COLOR: BEIGE

SIZE X	PART NO. 125CH-D-XX	REV. B
REF: S00123T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1